

FINNEGAN, HENDERSON, FARABOW, GARRETT & DUNNER, L.L.P.

1300 I STREET, N. W.
WASHINGTON, DC 20005-3315

MARCUS B. FINNEGAN
1927-1979

DOUGLAS B. HENDERSON
FORD F. FARABOW, JR.
ARTHUR S. GARRETT
DONALD R. DUNNER
BRAND G. BRUNSVOLD
BRAND D. JENNINGS IV
BRAND VOIGHT
LAWRENCE R. HEFTER
NATHAN E. PAYNE
ROBERT H. MINTZ
ROBERT J. SANTORELLI
MICHAEL C. ELMER
JOHN H. SMITH
JOHN L. PETERSON
JOAN ROMARY
DONALD P. ZOTTER
DONALD P. O'REILLEY
JOHN M. SOKAL
ROBERT D. BAJEFSKY
RICHARD L. STROUP
DAVID W. HILL
THOMAS L. IRVING
CHARLES E. LIPSEY
THOMAS W. WINLAND
BASIL J. LEWIS
MARTIN I. FUCHS
E. ROBERT YOCHESS
BARRY W. GRAHAM
SUSAN HABERMAN GRIFFEN
RICHARD B. RAGINE
THOMAS H. JENKINS
ROBERT E. CONVERSE, JR.
CLAIR X. MULLEN, JR.
CHRISTOPHER P. FOLEY
JOHN C. PAUL
ROGER D. TAYLOR
GRIFFITH B. PRICE, JR.
JOHN F. HORNICK
ROBERT D. LITOWITZ
DAVID M. KELLY
KENNETH J. MEYERS
CAROL P. EINAUDI
WALTER Y. BOYD, JR.
STEVEN M. ANZALONE
DARREL C. KARL
JEAN BURKE FORDIS

BARBARA CLARKE McCURDY
JAMES K. HAMMOND
RICHARD V. BURGJIAN
J. MICHAEL JAKES
JOHN C. LOWE
DIRK D. THOMAS
THOMAS W. BANKS
CHRISTOPHER P. ISAAC
BRYAN C. DINER
M. PAUL BARKER
ANDREW CHANHO SONU
MARK S. SOMMERS
KENNETH M. FRANKEL
WILLIAM H. PRATT
DAVID S. FORMAN
VINCENT P. KOVALICK
DON O. BURLEY
GERSON S. PANITCH
JAMES W. EDMONDSON
MICHAEL R. MCGURK
CHERRI M. TAYLOR
JOANN M. NETH
LINDA A. WADLER
LIAM O'GRADY
CHARLES E. VAN HORN*
IAN C. BALLON*
JEFFREY A. BERKOWITZ
MICHAEL R. KELLY
JAMES B. MONROE
DORIS JOHNSON HINES
JEFFREY D. KARCESKI
DAVID A. MANSPEIZER
LORI-ANN JOHNSON
R. BRUCE BOWER
THOMAS H. MARTIN
LISA F. PELLER
THALIA V. WARNEMENT
MICHELE C. BOSCH
HOWARD W. LEVINE
LESLIE I. BOOKOFF
JOHN R. ALISON
BARBARA R. RUDOLPH
JEFF E. SCHWARTZ
ANTHONY M. GUTOWSKI
HOWARD A. KWON
JULIA ANNE MATHESON
L. SCOTT BURWELL

202-408-4000
FACSIMILE 202-408-4400

PALO ALTO, CALIFORNIA OFFICE

TELEPHONE 650-849-6600
FACSIMILE 650-849-6666

ATLANTA, GEORGIA OFFICE

TELEPHONE 404-653-6400
FACSIMILE 404-653-6444

BRUSSELS, BELGIUM OFFICE

TELEPHONE 011-322-646-0353
FACSIMILE 011-322-646-2135

TOKYO, JAPAN OFFICE

TELEPHONE 011-813-3431-6943
FACSIMILE 011-813-3431-6945

WRITER'S DIRECT DIAL NUMBER:

(202) 408-4018

December 30, 1998

ALLEN M. LO
MICHAEL A. MORIN
ROBERT L. BURNS
DOUGLAS A. RETTEW
ESTHER H. LIM
MICHAEL T. SIEKMAN
CHRISTIE BATY HEINZE
DAVID L. CLARK
FRANK A. DECOSTA III
MARCIA R. MORTON
B. BRETT HEAVNER
SIMONE L. LONIGAN
MICHAEL J. FLIBBERT
RICHARD L. RAINEY
STEVEN P. O'CONNOR
SCOTT A. HERBST
YORK M. FAULKNER
JACQUELINE M. RYALL
YITAI HU
MONICA B. RICHMAN
ALAN A. WRIGHT
MICHAEL V. KRULJAC
PAOLO M. TREVISAN
SCOTT H. BLACKMAN
ANDREW C. WARNECKE*
BARRY D. BIDDLE
ANTHONY A. DREUX*
LIONEL M. LAVENUE
SUSAN M. MUCHMORE
W. CHARLES SAUNDERS*
COURTNEY H. BAILEY
JOHN M. ALBRIGHT*
JENNIFER M. COLAIANNI*
KEITH M. KUPFFERSCHMID*
KARLTON C. BUTTS*
MARK J. PINO*
LANCE L. VIETZKE
KRISTIN L. YOHANNAN
MICHAEL L. KIKLIS*
HOUSTAN K. ESFAHANI
ELIZABETH A. HURLEY
KATHLEEN A. DALEY
KURT A. LUTHER*
MONICA A. RIVA*
JEANNE M. TANNER*
CHERYL A. LILJESTRAND*
KULPREET S. RANA*

EYAL H. BARASH*
STEVEN J. SCOTT*
ERIK R. PUKNYS*
JOHN J. YIM*
LELAND Z. WIESNER*
JA K. MOON*
REBECCA M. McNEILL*
KIMANI P. CLARK*
LYNNE E. PETTIGREW
GEOFFREY C. MASON*
NAOKI YOSHIDA*
DENNIS A. BROWNE*
PARMANAND K. SHARMA*
MARJORIE M. GOUX*
JOHN W. BURNS*
F. LESLIE BESSENGER III*
MITCHELL S. WEATHERLY*
VIRGINIA L. CARRON*
MARGO A. BAGLEY*

COUNSEL
ARTHUR J. LEVINE
GEORGE E. HUTCHINSON
WILLIAM T. MCCLAIN
ROBERT F. ZIEMS
ROBERT J. EICHELBERG
ERNEST F. CHAPMAN
WAYNE W. HERRINGTON
ROBERT A. CAHILL
C. EDWARD GOOD*
LESLIE A. McDONELL
ALLEN R. JENSEN
JAMES J. BROWN
KRISTEN K. BATTANI*
JEFFREY B. CHASNOW*
CHARLES S. HALL

PATENT AGENT
FRANK E. CAFFOEE

*ADMITTED TO A BAR OTHER THAN DC

ATTORNEY DOCKET NO. 03384.0323-00000

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Re: New U.S. Patent Application
Title: PRIVATE BRANCH EXCHANGE BUILT USING
AN ATM NETWORK
Inventors: David Ian HOPPER, Greg BERNSTEIN,
Michel KHOUDERCHAH, Denny LANDAVERI,
Du-Tuan LAM, George IRWIN and Nader TAJBAKSHS
Our Reference: 03384.0323-00000

Sir:

We enclose the following papers for filing in the United States Patent and
Trademark Office in connection with the above patent application.

December 30, 1998

Page 2

1. Application - 39 pages, including 5 independent claims and 14 claims total.
2. Drawings - 16 sheets of informal drawings.
3. A check for \$916.00 representing the filing fee.
4. Information Disclosure Statement including 3 references.

This application is being filed under the provisions of 37 C.F.R. § 1.53(f). Applicant await notification from the Patent and Trademark Office of the time set for filing the Declaration.

Please accord this application a serial number and filing date.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: Kara F. Stoll
Kara F. Stoll
Reg. No. 41,484

REC/CWD/bap
Enclosures

PATENT
Attorney Docket No. 03384.0323-0000

UNITED STATES PATENT APPLICATION

OF

**DAVID IAN HOPPER, GREG BERNSTEIN, MICHEL KHOUDERCHAH,
DENNY LANDAVERI, DU-TUAN LAM, GEORGE IRWIN AND
NADER TAJBAKSHS**

FOR

PRIVATE BRANCH EXCHANGE BUILT USING AN ATM NETWORK

LAW OFFICES

**FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, D.C. 20005
202-408-4000**

RELATED APPLICATIONS

This application is related to U.S. patent application, Serial No. 09/____,____ (Atty. Docket No. 3384.0324-00000), entitled VIRTUAL JUNCTORS; U.S. patent application, Serial No. 09/____,____ (Atty. Docket No. 3384.0325-00000), entitled MULTIPLE NODE
5 NETWORK ARCHITECTURE; U.S. patent application, Serial No. 09/____,____ (Atty. Docket No. 3384.0327-00000), entitled USING AN ATM SWITCH TO GROW THE CAPACITY OF A SWITCHING STAGE; and U.S. patent application, Serial No. 09/____,____ (Atty. Docket No. 3384-0329), entitled DSO ON ATM, MAPPING AND HANDLING.

BACKGROUND OF THE INVENTION

10 The present invention relates to an apparatus and method for conveying information from a variety of sources to a variety of destinations, via a common network. More particularly, the invention relates to an apparatus and method for mapping pulse-coded modulated signals into packets and switching the packets in a network.

A typical digital telecommunications network provides a continuous bit rate service
15 using Time Division Multiplexing (TDM). Telephone sets as well as other terminal devices are connected to network ports via telephone lines. The network ports include interfaces for converting analog signals from the terminal devices into pulse code modulated (PCM) signals for transmission through the digital telecommunications network. In a communication between an originating port and a destination port on the digital network,
20 information is transmitted over a single high-speed channel in a pre-assigned time-slot on

periodic transmit and receive frames. Circuit switches operate to switch the information from the originating port to the destination port.

While TDM networks provide an adequate service for synchronous data like voice and video, TDM is not well suited for bursty (i.e., asynchronous) computer transmissions.

5 As a result, packet switching was introduced to provide efficient transport of computer transmissions. In packet switching networks, data signals are arranged into packets of any convenient length. The packets can be a fixed-length or a variable length. Each packet includes a header for, among other things, specifying a destination of the packet. After a packet has been assembled, a high-speed transmission path is allocated, but only for a
10 time sufficient to transport the packet of data toward its destination. Although digitized voice can be transported in this manner, the wide variances in delay caused by the operating characteristics of a packet network has demonstrated that packet switching is less than desirable at this point in time.

Fortunately, a broadband communications standard exists for accommodating both
15 synchronous and asynchronous communication applications. This standard, known as the Asynchronous Transfer Mode (ATM) standard, packs data into frames, each frame comprising a plurality of "cells," each cell being 53 bytes (i.e., octets) long. The 53 bytes in an ATM cell include a 5-byte header and a 48-byte payload. The 5-byte header generally includes a virtual path identifier (VPI) portion to associate the cell with a virtual
20 path, a virtual channel identifier (VCI) portion to associate the cell with a virtual channel, a payload type portion to identify the type of information in the payload, a header error

control portion, and a group flow control portion. The recommended standards are defined by the ATM Forum and are available from several publishers, such as Prentice Hall of Englewood Cliffs, N.J. 07632, under the title ATM User-Network Interface Specification Version 3.0 (ISBN 0-13-225863-3).

5 The ATM protocol was designed to support many different applications within a network, and to treat each application according to its needs. Specifically, the ATM protocol allows voice, video, and computer transmissions to be combined over the same network. As noted, the transmission needs of each of these applications vary. In particular, some forms of data, like e-mail, are delay insensitive while other forms of data,
10 like voice and video, are delay sensitive. To meet the transmission needs of each application, ATM networks use complicated rules that specify how the network should treat each information type. In particular, typical ATM networks provide a set of instructions for packing information into the ATM cells.

 The process of packing information signals into cells or packets is known as
15 "mapping." For each information type supported by the network, the network implements a different mapping scheme dependent upon the transmission needs of that information type. In addition to the mapping scheme, the network assigns a priority level to each information type. The network then allocates more resources to higher priority data. For example, when there is more information that must be transmitted in a given frame than
20 there are available cells for carrying that information, higher priority level data will be

transmitted first. In this manner, the various information signals may or may not be granted access to the network.

The complexity of the ATM mapping often leads to lengthy delays. Real time data, such as video and voice, may be adversely affected by such delays. For example, delays in the delivery of voice signals may cause echoing and jitter, thereby hindering the natural flow of conversation. In most ATM systems, multiple samples of a single audio stream are collected until a fixed-size ATM cell is full; this directly causes a six-millisecond delay. In a typical long-distance communication, there are repeated conversions from ATM to TDM and from TDM to ATM to make use of existing public switching telephone network (PSTN) facilities (which use T1/E1 lines). Each such conversion into ATM cells causes the six-millisecond packetization delay. End to end, such delays can easily exceed the level where echo cancellation is required for analog telephone sets. In addition, echo cancellation is difficult and often imperfect.

In some ATM systems, samples from various data streams are collected and placed into each fixed-size ATM cell. In other words, samples from the same data stream may be transmitted in different ATM cells. These ATM cells may be routed through different paths to the destination. As a result, samples from the same data stream might not be received at the destination end in the same order in which they were sent at the originating end. The network includes components to reorder the information signals. This reordering of the data may result in additional delay.

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, D. C. 20005
202-408-4000

ATM switches may introduce further delay in the transmission of data. ATM switches receive incoming ATM cells on a virtual connection and switch the entire cell to another virtual connection based on destination information in the cell's header. The ATM switches often establish a new route for each cell that they switch. The establishment of the virtual connections on an as-needed basis may introduce network control delays.

SUMMARY OF THE INVENTION

Accordingly, the present invention is directed to systems and methods that substantially obviate one or more of the above problems (as well as other disadvantages in conventional telecommunications networks). In particular, systems and methods consistent with the present invention provide network access to each communication line connected to the network in each frame and switch the data within a predetermined time period.

In accordance with the purposes of the invention, as embodied and broadly described, the systems and methods consistent with the present invention comprise one or more access controllers and a node controller. The access controllers map time-division multiplex (TDM) data into packets. The access controllers write TDM data from each communication line into assigned locations in the packets in each transmission frame. The access controllers transmit the packet data to the node controller. The node controller separately switches the data in each packet slot in a manner consistent with the mapping scheme.

In another aspect, the invention comprises a method of providing a path between an originating port and a destination port. The method includes receiving TDM data from the originating port and mapping the TDM data into a packet slot assigned to the originating port. In a method consistent with the present invention, the data in the packet slot assigned to the originating port is switched into a packet slot assigned to the destination port.

The above description of the invention and the following description for carrying out the best mode of the invention should not restrict the scope of the claimed invention. Both provide examples and explanations to enable others to practice the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and constitute a part of this specification, illustrate and together with the description, serve to explain the principles of the invention.

IN THE DRAWINGS:

Fig. 1 is a block diagram of a single node communication network consistent with the invention;

Fig. 2A illustrates DS0 to cell mapping consistent with the invention.

Fig. 2B illustrates cell translation by an access controller and cell slot switching by a node controller in accordance with an embodiment of the invention;

Fig. 3 is a block diagram of a multiple node communication network consistent with the invention;

Fig. 4 illustrates permanent virtual circuits in a block diagram of a network in accordance with an embodiment of the invention;

5 Fig. 4B illustrates an exemplary operation of a multiple node network having permanent virtual circuits in accordance with the invention;

Fig. 5 is a block diagram of an access controller consistent with the present invention;

Fig. 6 is a block diagram of a node controller consistent with the present invention;

10 Fig. 7 is a block diagram of a switching block in a node controller consistent with the present invention;

Fig. 8 is a block diagram of a call server consistent with the present invention;

Fig. 9 is a block diagram of a network including clock synchronization in accordance with the present invention;

15 Fig. 10 is a more detailed block diagram of a network including clock synchronization in accordance with the present invention;

Fig. 11 is a block diagram of the single-node architecture in figure 1 with a redundant call server;

20 Fig. 12 is a block diagram of the multiple node architecture in figure 2 with a redundant call server;

Fig. 13 is a block diagram of an architecture consistent with the present invention having a redundant node controller, a redundant inter-node switch, and a redundant call server; and

5 Fig. 14 illustrates a heartbeat mechanism in a network in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Reference will now be made to the present preferred embodiment of the invention, an example of which is illustrated in the accompanying drawings. Where appropriate, the same reference numerals refer to the same or similar elements. While the appended
10 claims define the scope of the invention, the following description does not limit that scope. While the appended claims define the scope of the invention, the following description does not limit that scope.

System Architecture

Systems and methods consistent with the invention include M node controllers
15 interconnected by an inter-node switch. A node controller is a basic switching unit, which supports a limited number of peripheral groups. In the preferred embodiment, the node controller supports 1,024 communication lines. The number of node controllers, M, is based upon the number of communication lines that must be switched by the network. In a system where $M=1$, the inter-node switch is not necessary. Therefore, two basic
20 configurations are defined: a single node architecture consisting of exactly one switching

node, shown in figure 2, and a multiple node architecture, consisting of two or more switching nodes and one inter-node switch, shown in figure 3.

Figure 1 is a block diagram of a single node architecture consistent with the present invention. The network includes control stage 110, switching stage 120, and access stage 150. As shown, switching stage 130 encompasses a single node controller 140, connected to one or more access controllers 160 on one side and connected to call server 120 on the other side. The connection between each network element is, for example, composed of an ATM compliant fiber optic cable, preferably running OC-3 framing at 155.52 Mbps. The ATM cells are carried within this framing structure. Of course, those skilled in the art would appreciate that the system could utilize any other desirable electrical or optical link and any other desirable link framing structure, such as STS-3 (155.52 Mbps), STS-1 or OC-1 (51.84 Mbps), STS-9 or OC-9 (466.56 Mbps), or STS-12 or OC-12 (622.08 Mbps).

The access stage 150 provides connectivity between the switching stage 130 and the peripherals (e.g., A/D lines, T1/E1 lines, wireless, and BRI/PRI) 180 that provide voice, video, computer transmissions and any other desired information type. In addition to data, the peripherals provide signalling (i.e., messaging) instructions that, among other things, inform the network of the location of the destination party in a communication between an originating party and a destination party. In the preferred embodiment, each access controller 160 provides network access to 640 communication lines 180, each carrying data in Digital Signal-0 format (DS0) plus two signalling bits. The term DS0 refers to 64

Kbs pulse-code modulated samples of data. Of course, one of ordinary skill in the art would appreciate that the methods and systems consistent with the invention could receive digital input signals of any desired format. For simplicity in explaining the invention, the written description will simply refer to DS0 data.

5 In accordance with the invention, access controller 160 maps the incoming DS0 data and messaging onto ATM cells. Figure 2A illustrates a mapping process consistent with the invention. Access controller 160 receives communication lines from line card 1 (LC1), trunk card 2 (TC2), line card 3 (LC3) and trunk card 4 (TC4). In the example illustrated in figure 2A, each line card (LC1 and LC3) has 32 communication lines. Access
10 controller 160 maps the DS0 data on each of the communication lines into a dedicated slot in a dedicated ATM cell in each transmission frame.

For example, in a 125-microsecond frame where 14 cells are dedicated for transmitting DS0 data, the cell number assigned to a given communication line equals 1 to 14. Where each cell slot corresponds to a byte or octet, the cell slot number equals 1
15 to 48, corresponding to the 48-octet payload of an ATM cell. This example is illustrated in figure 2A. The access controller 160 maps one byte of DS0 data from the first communication line in line card 1 (LC1) into the first payload octet of the first ATM cell. Although not shown, the access controller 160 maps one byte of DS0 data from the second communication line in line card 1 (LC1) into the second payload octet of the first ATM cell.
20 Similarly, the access controller 160 maps one byte of DS0 data from each of the communication lines in line card 1 (LC1), trunk card 2 (TC2), line card 3 (LC3) and trunk

card 4 (TC4) onto a payload octet of an ATM cell. For example, as shown, the access controller 160 maps the DS0 data from the fourteenth line in trunk card 2 (TC2) into the forty-eighth payload octet of first ATM cell.

5 Preferably, the DS0 data from a particular communication line is sent to the same prefixed slot in a frame. Generally, the assignment to a particular cell and cell slot is based on the location of the line in the peripheral shelf. Even if no data is present on the communication line, the designated cell slot corresponding to that line is kept available for data from that communication line.

10 In this manner, the access controller provides a "non-blocking network." In other words, the network guarantees transmission of data from the originating line to the terminating or destination line in each frame. In addition, processing delays are minimized because the mapping technique is constant and simple. The access controller consistent with the present invention eliminates the need to reorder the DS0 data on the terminating end of the ATM network.

15 After mapping the messaging and DS0 data into ATM cells, access controller 160 transmits the ATM cells to the node controller 140. In the single node architecture, DS0 data and messaging flow from the access controllers 160 to the node controller 140 and from the node controller 140 to the access controllers 160. Again, the DS0 data is preferably received and transmitted in 14 ATM cells every 125 microseconds.

20 Node controller 140 performs DS0 switching and message routing. The switching provided by node controller 140 is also non-blocking. As applied to the node controller

140, "non-blocking" means that any communication line can be switched to any other line at any time. The data can be switched to any other line within the same access controller group or a different access controller group. When a connection is set up between an originating line and a destination line, a switching path is established through the access controller(s) and the node controller until the connection is terminated.

Control stage 110 includes call server 120. Call server 120 sends messaging signals to and receives messaging signals from the node controller 140. Based on messaging signals sent from the peripherals 180 to the access controller 160 to the node controller 140 to the call server 120, the call server 120 determines the identity of the originating communication line and the identity of the destination communication line. The call server 120 then sends messaging to the node controller 140, directing the node controller 140 to switch the data from the originating line to the destination line.

The System Management Platform (SMP) 170 manages the control stage 110, the switching stage 130, and the access stage 150. Essentially, SMP 170 is a personal computer-based user interface that allows the system administrator to configure, administer, monitor, and maintain each network element. For example, the network administrator can specify the number of terminals, trunks, and cards connected to an access controller 160. In addition, SMP 170 performs fault treatment, accounting, and security control functions.

An example of the operation of the single node architecture is illustrated in figure 2. When a user originates a connection (e.g., by picking up the telephone and dialing a

destination telephone number), a message conveying the destination number is sent from access controller 160 to node controller 140 to call server 120. The message is carried in an ATM cell. Upon receipt of the message, call server 120 looks up the destination number in a look-up table 210 to determine the cell number and cell slot assigned to that destination number. The call server 120 thus determines the pair of communication lines (and thus the corresponding cell numbers and cell slots) involved in the call. For example, in figure 2, the cell number, slot number assigned to the originating line is 2, A. The cell number, slot number assigned to the destination line is 10, D. The call server 120 then sends messages to the node controller 140, directing the node controller 140 to switch the data in cell no. 2, cell slot A (assigned to the originating line) into cell no. 10, cell slot D (assigned to the destination line). A switching path between the originating line and the destination line is thus established. The node controller continues to switch data in the cell slot assigned to the originating line (i.e., 2, A) into the cell slot assigned to the destination line (i.e., 10, D) until the call server directs the node controller to stop doing so. Specifically, when the user terminates the connection (e.g., by placing the telephone on-hook), the access controller 160 sends an "on-hook" message to the call server 120 through the node controller 140. In response, the call server terminates the switching path between cell no. 2, cell slot A and cell no. 10, cell slot D.

Each node controller is capable of switching multiple lines up to a limited capacity. In the preferred embodiment, each node controller can switch DS0 data from up to 1,024 ports. In order to build a system with many times that capacity, a second stage ATM

switching element must be employed. In other words, to facilitate more than 1,024 ports, systems and methods consistent with the present invention use a multiple node structure with a second stage switch for switching between the nodes. A standard ATM or packet switch serves as the second stage switch. However, as noted above, these standard switches may introduce delay. To provide a second stage switch without introducing delay, methods and systems consistent with the invention use a common clock reference and permanent virtual paths to route DS0 loaded cells between node controllers through the standard ATM switch. The permanent virtual paths between the node controllers and the inter-node switch are interchangeably referred to as virtual junctors.

Figure 3 is a block diagram of the multi-node architecture, including call server 120, inter-node switch (INS) 310, plural node controllers 140, and plural access controllers 160. Each node controller 140 connects on one side to four access controllers 160 and on the other side to the INS 310. The INS 310 interfaces with the call server 120, the node controller 140, and application servers (such as Meridian Mail or Interactive Voice Response applications). As in the single node architecture, PCM data preferably flows in 14 ATM cells every 125 microseconds and is switched by the node controller and the INS.

In the multiple node architecture, node controller 140 is the first stage of switching network 330 while inter-node switch 310 is the second stage of the switching network 330. As in the single-node architecture, the node controller performs switching between access controllers connected to the same node controller. This is known as "intra-node switching." Also as in the single-node architecture, node controller 140 provides both cell slot and cell

switching. The inter-node switch facilitates switching between access controllers connected to different node controllers. This is known as "inter-node switching."

The inter-node switch (INS) provides standard ATM cell switching. A preferred INS offers scalability in modules of 4 ATM ports and can expand to up to 8 modules or 32 ATM ports. The INS 310 provides for connection paths between multiple node controllers while transferring messaging between the multiple node controllers 140 and the call server 120.

The paths interconnecting the access controller 160, the node controller 140, the inter-node switch 310, and the call server 120 are virtual paths. The paths are permanent, that is, they are predefined and continually available. If information is not being transmitted over the path, then it does not take up any space on the network. In other words, an unused permanent virtual path does not use any bandwidth. The path is virtual in the sense that the path is assigned an address, but it is not hardwired. Permanently establishing the virtual paths, as opposed to establishing paths on an as-needed basis, is desirable because less processing is needed, thus making switching by the INS and the node controller easier and faster.

Figure 4 is a block diagram of the multi-node architecture illustrating the permanent virtual paths. Each node controller 140 is connected to the other node controllers in the system through the inter-node switch 310. For example, as shown, two permanent virtual paths connect node controller 1 to node controller 2 through the inter-node switch 310. The first virtual path, A, carries cells traveling from node controller 1 through the inter-node switch 310 to node controller 2. The second virtual path, B, carries cells traveling from

node controller 2 through the inter-node switch 310 to node controller 1. Node controller 1 is also connected to node controller 3 via two permanent virtual paths. Likewise, node controller 2 is connected to node controller 3 via two permanent virtual paths.

A similar path structure connects each access controller 160 to the other access controllers through the node controller 140. As shown in figure 4, two permanent virtual paths connect access controller 1 to access controller 4. The first path carries cells traveling from access controller 1 through node controller 2 to access controller 4. The second path carries cells traveling from access controller 4 through node controller 2 to access controller 1. Although not shown, two permanent virtual paths connect access controller 1 and access controller 2, two permanent virtual paths connect access controller 2 and access controller 3, and two permanent virtual paths connect access controller 3 and access controller 4 -- all through node controller 2.

The INS 310 is configured with the permanent virtual paths connecting each node controller to all other node controllers. In particular, the INS 310 includes a look-up table 410 for storing the permanent virtual paths and routing circuitry 420 to switch a cell received from one node controller to another node controller via the appropriate permanent virtual path. The virtual paths are permanently reserved in the INS look-up table 410 at system start-up. Thereafter, the INS performs its role without control by the call server on a call by call basis. The permanent virtual paths may be reconfigured via a user interface on the SMP 170 (figure 1).

Inter-node switching is preferably achieved using traditional ATM cell switching. With no inter-node traffic, the ATM link from the node controller to the INS 310 conveys idle cells. When an inter-node connection is established between node controller 1 and node controller 2, an idle cell is assigned to convey the traffic from node controller 1 to node controller 2 through the INS. The cells on the ATM link between the node controller and the INS are arranged in a frame which matches the TDM rate (e.g., 125 microseconds). The cell is tagged with a pre-defined permanent virtual circuit between node controllers 1 and 2. Because the PVCs are permanently reserved between the node controllers and the INS, and the ATM cells are transmitted at the PCM rate, delay in the delivery of voice signals is constant and minimal.

Figure 4B illustrates an exemplary operation of the multi-node network. First, in step 430, call server 120 determines the originating and destination communication lines involved in the connection. The call server 120 then determines the packet and packet slot corresponding to the destination line (step 440). If the same node controller 140 serves both lines, call server 120 requests the node controller involved to switch the lines using packet slot switching (step 460). Otherwise, if two different node controllers 140 serve the lines, call server 120 selects on each node controller 140 an inter-node permanent virtual path or junctor, that leads to the other node controller via the INS (step 470). Then, call server 120 requests each node controller 140 to switch the packets to the selected inter-node junctor (step 480). Since the INS 310 is pre-configured with permanent virtual paths between node controllers, the call server 120 does not have to send the INS 310 any

control commands on a call-by-call basis. When the node controller servicing the destination line receives the packets from INS 310, it then performs packet slot switching. In particular, the node controller 140 switches the data in the packet slot assigned to the originating line into the packet slot assigned to the destination line (step 490).

5 **Access Controller**

The access controller receives DS0 format signals from intelligent processing equipment (IPE). In particular, the access controller supports all existing DS0-based peripherals including line cards, trunk cards and service cards. In the preferred embodiment, each access controller receives data from 16 cards, each card having 32 DS0 channels, for a total of 640 DS0 channels.

In order to guarantee minimal delay for constant bit rate traffic, such as voice and video, the access controller feeds pulse-code-modulated samples of data into a designated slot in a designated cell every 125-microsecond period. With STS-3 (or OC-3) framing, 44 cells are transmitted in each 125-microsecond period. One of ordinary skill in the art would appreciate that the number of cells transmitted in each period varies with the framing (transmission speed) selected. Of the 44 available cells, 14 cells are dedicated to convey the DS0 data. The remaining 30 to 32 cells are used to convey regular variable bit rate traffic and messaging. One of ordinary skill would appreciate that the term "slot" may correspond to an octet or any other desired size slot.

20 Figure 5 is a block diagram of an access controller consistent with the present invention. The access controller includes an interface 510, a DS0 Handler 520, a

microprocessor unit (MPU) 530, a message processor 540, and a clock processor 550. Interface 510 generates a header error correction (HEC) code, adds the HEC code to the header, packs the ATM cells into the STS-3c (or OC-3) frame, and sends the data out serially at the 155.52 Mbps data rate. In the receive direction, the interface receives a
5 155.52 Mbps serial data stream, removes the ATM cells from the STS-3c (or OC-3) framing, and verifies the HEC code. A preferred interface for performing these functions is the SUNI-LITE™ interface from PMC-Sierra as a STS3-C (or OC-3) framer. Each STS3-C link carries 640 DS0 channels per 125 microsecond frame. Optionally, each access controller includes two ATM interfaces 510 to provide network access redundancy.

10 Message Processor 540 processes messages from the peripherals to the network elements as well as messages from the network elements to the peripherals. Message processor 540 includes an interface for receiving the messaging from the peripherals and a buffer for temporarily storing the messaging. The message processor 540 reads the
15 messages from the buffer and either processes the messages locally or sends the messages to the appropriate network element such as the call server 120. Messages sent to the call server 120 include, for example, a message indicating the identity of the destination party in a call between an originating party and a destination party. The messaging between the call server 120 and the access controller 160 is done by using the ATM Adaption Layer type 5 (AAL5). The ATM adaption layer (AAL) provides services to
20 the higher layers that support classes of service for transported data. Those of ordinary

skill would appreciate that a message processor consistent with the invention could use any other ATM adaption layer type.

5 The DS0 Handler 520 receives integrated voice and data channels from the intelligent peripheral devices. It then maps the data from these channels into ATM cells to be sent to the switching network through interface 510. The DS0 handler also receives ATM cells from the switching network through interface 510. It un-maps the ATM cells back into the integrated voice and data channels in a manner complementary to the mapping function.

10 Each frame, the access controller 160 sends a total of 14 ATM cells numbered 0 to 13. The DS0s are stored from octet 6 to octet 52 in the 14 cells. Each of the 640 lines received by the DS0 handler is assigned to a specific cell number and a specific octet number in the 14 ATM cells. The DS0 handler simply takes the data on line x, and places it in cell a, slot b according to a translation map. To perform this function, the DS0 handler includes a transmit state machine and a receive state machine. The state machines could be implemented using programmable gate arrays. In accordance with the ATM to DS0 map, the transmit state machine maps DS0 from a particular card number, and line number to a particular cell number and octet number on the 14 ATM cell frame. In a complementary manner, the receive state machine un-maps data from a particular cell number and octet number in a received 14 cell ATM frame into DS0 data associated with a particular card number and line number.

15

20

Clock processor 540 provides various clock signals for network operation. For example, the clock processor generates the 8KHz frame needed to transmit ATM cells every 125 microseconds.

Node Controller

5 The node controller is preferably capable of providing switching with the granularity of a single octet. In other words, the node controller performs traditional ATM cell switching as well as switching of n octets, where $n = 1$ to 48. In describing the invention, the term octet switching refers to the switching of an individual octet (i.e., a byte) in a cell or packet. The term slot switching (whether in a packet or a cell) encompasses not only
10 octet switching, but also the switching of n octets, where $n = 1$ to 48 in an ATM cell and $n = 1$ to X in a packet having a payload of X octets.

 Figure 6 is a block diagram of a node controller consistent with the present invention. The node controller 140 includes interfaces 610-616, switching block 620, microprocessor 630, clock processor 640, and messaging interface 650. In the preferred
15 embodiment, seven ATM links connect to interfaces 610-616. Two of the ATM links interface with the call server 120, providing a redundant configuration, and four of the ATM links interface with four access controllers 160. Although the seventh ATM link is not used in the node controller shown in figure 5, one of ordinary skill would appreciate that the seventh port interface with a network element, such as an access controller or an
20 application server like Meridian Mail or Interactive Voice Response. Regardless of whether

the interface is connected to a call server, an inter-node switch, an access controller, or an applications server, the architecture of each interface 610-616 remains the same.

5 Interfaces 610-613 receive data packed into ATM cells from the one or more access controllers. The ATM cells that travel between the access controller and the node controller include both DS0 data and messaging data. In the single-node architecture, interface 614 receives only messaging data from the call server 120. In the multi-node architecture, interface 614 receives both DS0 and messaging data from the INS 310.

10 As shown in figure 6, node controller 140 includes messaging interface 650 for termination and generation of AAL5 messaging. Messages received from access controller 160 are terminated locally or routed through to the call server 120. Where appropriate, messaging interface 650 assists in the routing of cells containing messaging from the access controller to the call server. This routing is performed using traditional ATM cell switching instead of octet switching. Messaging interface 650 also terminates the messages that are intended for the node controller and creates messages to be sent from
15 the node controller to other network elements.

Each of the interfaces 610-615 are connected to switching block 620. The node controller 140 includes a switching block 620 to support message routing using standard packet switching and switching of DS0 data using packet slot switching. Examples of switching blocks that switch both cells and octets are disclosed in U.S. patent application,
20 Serial No. 08/655,402, filed May 30, 1996, entitled TELECOMMUNICATIONS APPARATUS AND METHOD and U.S. Patent Number 5,841,771, issued November 24,

1998, entitled TELECOMMUNICATIONS SWITCH APPARATUS AND METHOD FOR TIME SWITCHING, both incorporated herein by reference.

Microprocessor 630 oversees the functions performed by the node controller 140. For example, microprocessor 630 oversees the operation of interfaces 610-616, updates and downloads system software, detects errors and provides redundancy switch-overs, and stores the firmware. In addition, microprocessor 630 communicates with the call server 120. In particular, microprocessor receives and processes the messaging between the node controller and the call server 120.

Clock processor 640 receives clock signals from inter-node switch 310 (in the multiple node architecture) or from call server 120 (in the single node architecture) over the ATM links. Software will select the clock from one of the interfaces (call server or INS depending on the system architecture) and use that for its internal clock generation. A receive clock can come from any of the interfaces. From this clock, the node controller will generate the transmit clocks for the ATM interfaces and a 8KHz frame pulse for use by the switch fabric.

Figure 7 is a block diagram of a switching block 700 for switching packet slots. An input multiplexer 710 and an output demultiplexer 730 are interconnected with a DS0 time switch integrated circuit 720. Incoming ATM cells are received at regular rates by the input multiplexer 710, via input lines 1-n, labeled 750. The input multiplexer 710 orders the incoming cells into a high speed data stream. At the output of the multiplexer 710, the high speed data stream is divided between two data streams, a payload data stream on a bus

705, and a header data stream, on a bus 715. The payload data stream consists of octets 06-53 and the header data stream consists of octets 01-05.

The DS0 time switch integrated circuit 720 receives the payload data stream. The DS0 time switch integrated circuit 720 exchanges the data in the various payload octet positions of the cells directed to it by the multiplexer 710. To perform this function, the time switch performs two essential steps. First, the time switch sequentially stores each octet in a buffer 770. Second, the time switch controller 780 reads out the octets from the buffer 770 in a random order thus creating a reordered set of payload data. The output of time switch integrated circuit 720 is a cell-structured payload data stream on a bus 735 wherein the octets are switched from a first cell number, slot number to a second cell number, slot number.

Controller 740 directs the octet switching functions of the DS0 time switch IC 720. Specifically, controller 740, in cooperation with time switch controller 780, selects a block of storage locations in the buffer 770 in the time switch integrated circuit 720 into which a cell, having been applied to the bus 705, is synchronously and sequentially stored. Based on input from microprocessor 630, output controller 740 also provides read addresses to time switch controller 780 for specifying an order of reading the octets from buffer 770 onto the bus 735, thus directing the switching of the octets. The octets read from buffer 770 form a newly ordered payload data stream. The read address from the controller 740 is supplied to the time switch IC 720 via a random read address bus 725.

Controller 740 also provides outgoing headers for the cells of payload data via bus 745. The data on buses 735 and 745 are combined as high speed stream of outgoing multiplexed cells at the input of a demultiplexer 730. Demultiplexer 730 operates in a manner more or less complementary to the function of the multiplexer 710. In particular, demultiplexer 730 distributes the outgoing multiplexed cells, as ATM cells across lines 1-n, labeled 760.

In this manner, systems and methods consistent with this invention sequentially store the cell octets and randomly reading the cell octets to effect a desired altered order in the cell slots in each 14-cell frame. It will be recognized by persons of typical skill in the electronic switching and telephony arts that the objective of rearranging the temporal order of the octets can also be effected in the time switch by randomly storing the cell octets and sequentially reading the cell octets.

Call Server

The call server 120 is responsible for all call processing from the time a call is initiated until it is terminated. Call server 120 interfaces with the node controller 140 (in the single node configuration) or the inter-node switch 310 (in the multiple node configuration) via a STS-3c link to pass messaging to the network. As used in this specification, the terms messaging, signalling, and control information are interchangeable. In particular, the call server 120 performs several important functions in connection with the switching of octets and cells. First, call server 120 recognizes the originating party and determines the location of the destination party. Second, call server 120 sets the path for the node

controller 140 to switch the DS0 data from the originating line to an ATM cell going to the destination line. Specifically, the call server receives a signalling package from the access controller when a telephone call (or other communication) is originated. The signalling package might include an "off-hook" message. The signalling package is passed from the peripheral (e.g., a line card) to the access controller 160 to the node controller 140 to the call server 120. Call server 120 includes a look-up table that allows it to translate the received message into a destination location and the cell slot assigned to that destination location. Call server 120 then sends a messaging packet to the node controller containing the destination route information. The call server 120 sends the node controller 140 a signalling packet identifying (1) the ATM link, (2) the cell in the 14-cell frame and (3) the cell slot in which the node controller should place the data in the originating cell slot.

In addition to call processing, the call server 120 also operates as a communication interface between the system management platform (SMP) 170, the INS 310, the node controller(s) 140 and the access controllers 160 so the SMP 170 can retrieve information from and send information to these network elements to perform management functions. Finally, the call server 120 supplies a reference clock source to the switching network.

Figure 8 is a block diagram of a call server consistent with the present invention. The call server consists of a call processor (CP) 810, an input-output controller (IOC) 820, a clock controller (CLK) 830, and a System Monitor (SYSMON) 840. The call processor 810 is a software-based processor having dynamic memory banks that support centralized call processing and system resource management. In particular, the call processor 810

translates the above-described messages from the access controllers 160 into destination information and sends control information to the access stage and the switching stage to assist in the mapping and switching functions.

The input-output controller (IOC) 820 performs two major functions. First, the input-output processor stores system software for the call processor 810 and all other network elements, as well as system configuration data, customer data base, and alarm and trace log files. Second, the input-output controller 820 interconnects the call server 120 with the switching network. Specifically, two ATM ports are provided to connect the input-output controller 820 to the inter-node switch 310 (in the multiple node configuration) or the node controller 140 (in the single-node configuration).

The system monitor (SYSMON) 840 oversees the system power and environmental conditions, ensuring that the conditions are adequate to maintain network operation. Upon detection of inadequate conditions, the SYSMON 840 activates alarms that trigger the call processor (CP) 810 to initiate corrective actions.

The clock controller 830 provides the network with an accurate clock signal. The switching stage 130 uses the clock reference for synchronization purposes. The clock controller 830 serves as a master clock and can either generate a clock signal, or more preferably, it can derive the clock signal from the public switched network via a digital interface such as a T1/E1 digital interface.

20

Network Synchronization

Because the network is based on a synchronous architecture, a common system clock must be used to coordinate the rate of internal mapping and switching operation as well as internal traffic flow. Figure 9 is a block diagram of a synchronization mechanism employed in the present invention. The clock controller 830 is placed in the call server 120 and is synchronized to a network supplied timing source such as the master clock in the public switched network. In particular, the clock controller 830 derives a system clock from a T1/E1 link connected to the public switching network. The INS is used as a slave clock to pass on the system clock from the upstream call server to the downstream node controllers and access controllers. The inter-node switch 310 derives a slave clock from an ATM link between the inter-node switch and the call server. The inter-node switch then provides a slave clock at each of the ATM ports connected to the node controllers 140. The node controllers 140 in turn provide the clock signals to the access controllers 160. In this manner, the elements of the network are synchronized to the same clock source.

Figure 10 is a more detailed block diagram of the synchronization mechanism shown in figure 9. The master clock, clock controller 830, is synchronized to a network supplied timing source such as the clock in the public switched network. In particular, the clock controller 830 in call server 120 derives a clock from a T1/E1 link connected to the T1 trunk connected to the public switching network. As discussed in connection with figure 9, the master clock 830 in the call server 120 is used to coordinate the rate of internal mapping and switching operation as well as internal traffic flow. The INS 310 is

redundantly connected to the call server 120 via to ATM links. The INS 310 can derive the clock signal from either of the two input links. If connection to one of two ATM links is lost, the clock controller 830 will switch-over to synchronize the INS clock on the other line.

One of ordinary skill in the art would appreciate that the clock controller 830 could be located in a different network element. For example, instead of being located in call server 120, the clock controller could be located in INS 310. In a manner similar to clock controller 830, an INS clock controller derives the system clock from a SONET link to the public switching network.

Redundancy

In order to obtain a higher level of reliability, systems and methods consistent with the present invention offer different levels of redundancy.

A second call server can be optionally added to the system configuration. Figure 11 shows a block diagram of a single-node network consistent with the present invention having a redundant call server. Figure 12 shows a block diagram of a multiple-node network consistent with the invention having a redundant call server. As shown in both figures 11 and 12, the two call servers 120 are interconnected with each other so that they can operate in a redundant mode. The call server redundancy uses a stand-by scheme whereby one call server is active while the second one is held inactive but ready to run. A switch-over allows the active call server to relinquish control and let the other call server become active. While the active call server 120 usually controls the switch-over, the switch-over is automatically triggered when the active call server is deemed faulty. In

figure 11, node controller 140 connects to both call servers and can receive and transmit messaging from either call server link at any time. Similarly, in figure 12, INS 310 connects to both call servers and can receive and transmit messaging from either call server link at any time.

5 The two call processors 810 are interconnected via an inter-CP cable and the two input-output controllers 820 are interconnected via an inter-IOC cable. Both of the input-output controllers 820 are permanently active. The call processors 810 are programmed to operate in a redundant mode; that is, one call processor is selected to be active while the other is inactive. The dynamic memory banks in the two call processors 810 are
10 updated via the inter-CP cable. When the active call processor reads from the dynamic memory, only the primary memory on the active call processor is read, but when the active processor writes to the active memory, the secondary memory on the inactive call processor is automatically updated. The content of the mass storage, hard disk, is similarly synchronized in real-time via the inter-IOC cable.

15 Both clock controllers, CLK0 and CLK1, are permanently active. Under normal operation, the active clock controller selects which CLK 830 is providing the more accurate clock signal. A CLK switch-over occurs when the CLK pair notifies the input/output processor that the secondary clock is generating a better clock signal. The active CP-IOC then picks up the clock signal from the second clock therefore switching the primary and
20 secondary clocks. The inter-node switch 310 (or the node controller 140 in the single node

architecture) is connected to the call servers via two ATM links and can derive the slave clock signals from either of these two links.

Figure 13 illustrates additional levels of redundancy consistent with the present invention. First, systems and methods consistent with the invention offer peripheral access redundancy. In particular, the access controller 160 provides an optional redundant link, so one access controller can connect to two redundant node controllers 140. The access controller optionally includes two interfaces 510 for separate interaction with the primary and secondary node controllers. The access controller transmits DS0 cells on both the active link and the standby link, transmits messaging cells only on the active link, and listens only to the active link with respect to receiving DS0 and messaging cells. Peripheral access redundancy is centrally coordinated by call server 120 which tells access controller 160 which link is the primary ATM link. When one of the interfaces 510 detects a fault with the primary link, node controller 160 automatically switches to receive on the other link and notifies the call server of the switch.

Similarly, each node controller 140 provides an optional redundant link, so one node controller can connect to two redundant inter-node switches 310. Finally, each inter-node switch 310 provides an optional redundant link, so an inter-node switch 310 can connect to two redundant call servers 120.

Redundancy is centrally coordinated by call server 120. In performing this function, call server 120 implements a heartbeat mechanism. Figure 14 illustrates the use of a heartbeat mechanism in a network consistent with the present invention having redundant

network elements and/or links. The call server 120 generates a heartbeat signal (e.g., a periodic message). The call server 120 periodically transmits the signal in an ATM cell to the inter-node switch 310 (or the node controller 140 in the single node structure) which in turn passes the signal on to the node controller 140 (or the access controller 120 in the single node structure) which in turn passes the signal to the access controller 120. Upon receipt of the heartbeat signal, each network element sends a response back to the call server. If the call server 120 does not receive a response from a particular network element or elements, the call server informs SMP 170, detects which element is faulty, and directs the appropriate switch-over to a redundant network element.

While there has been illustrated and described to be preferred embodiments and methods of the present invention, those skilled in the art will understand that various changes and modifications may be made, and equivalents may be substituted for elements thereof, without departing from the true scope of the invention.

For example, although the preferred embodiment has been described as providing pulse-code modulated (PCM) data over ATM, one of ordinary skill would appreciate that the invention is not limited to ATM cells. Rather, methods and systems consistent with the invention could use any type of packet data. For example, systems and methods consistent with the invention include an access stage for converting PCM into internet protocol (IP) packets for transfer over an Ethernet or standard LAN, a switching stage for providing packet and packet slot switching of the IP packets, and a control stage.

In addition, many modifications may be made to adapt a particular element, technique or implementation to the teachings of the present invention without departing from the central scope of the invention. Therefore, this invention should not be limited to the particular embodiments and methods disclosed herein, but should include all
5 embodiments falling within the scope of the appended claims.

02 06 08 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 56 58 60 62 64 66 68 70 72 74 76 78 80 82 84 86 88 90 92 94 96 98 100

WHAT IS CLAIMED IS:

1 1. A network for transporting data from an originating port to a destination port
2 comprising:

3 at least one controller, each controller including:
4 means for receiving data in time division multiplex (TDM) format from an originating port,
5 and

6 means for mapping the TDM data into fixed-length packets, wherein the TDM
7 data is written into a predetermined packet slot permanently assigned to the originating
8 port;

9 and a switching element connected to the one or more controllers including:

10 means for receiving the packets from the one or more controllers, and

11 means for separately switching the data in each packet slot received from the
12 controllers into a packet slot preassigned to the destination port.

1 2. The network according to claim 1, further comprising a call server connected
2 to the switching element, including:

3 means for determining the destination port associated with the data in each
4 incoming packet slot based on a message transmitted from the controller to the switching
5 element to the call server.

1 3. The network according to claim 2, wherein the call server further comprises
2 means for instructing the switching elements to switch the data in the packet slot into the
3 packet slot corresponding to the destination port.

1 4. A non-blocking network for transporting packet data from an originating port
2 to a destination port, including:

3 at least one controller connected to plural ports, wherein each controller
4 includes an interface to receive time division multiplex (TDM) data from an originating port
5 and a state machine to write the TDM data into a packet slot assigned to the originating
6 port; and

7 a switching element including an interface to receive packet data from the
8 one or more controllers and a switching circuit to switch the TDM data in the packet slot
9 assigned to the originating port into an outgoing packet slot assigned to the destination
10 port.

1 5. A network according to claim 4, further comprising a call server to determine
2 the identity of the destination port.

1 6. A network according to claim 5, wherein the call server further includes a
2 look-up table to identify the packet slot corresponding to the destination port.

1 7. A network according to claim 6, wherein the call server further includes an
2 input/output controller to send a message to the switching element instructing the switching
3 element to switch the TDM data in the packet slot assigned to the originating port into the
4 packet slot assigned to the destination port.

1 8. A node controller connected to plural access controllers, including:
2 means for receiving packet data from the plural access controllers, and
3 means for separately switching each slot in the packet data received from the
4 plural access controllers into a packet slot preassigned to the destination port.

1 9. A switching element connected to one or more controllers and a call server,
2 including:
3 an interface to receive incoming ATM cells from the one or more controllers;
4 a microprocessor to receive octet switching directions from the call server on
5 how to individually switch each octet in the incoming ATM cells into outgoing ATM cells;
6 and
7 a time switch processor to switch each octet in the incoming ATM cells into
8 outgoing ATM cells in response to the octet switching directions.

1 10. A switching element according to claim 9, further comprising:
2

1 a multiplexer to multiplex the incoming ATM cells into a single stream of ATM
2 cells; and
3 a de-multiplexer to de-multiplex the outgoing ATM cells into plural streams
4 of ATM cells.

1 11. A switching element according to claim 9, wherein the microprocessor further
2 includes an address generator to generate read addresses in response to the octet
3 switching directions from the call server.

1 12. A switching element according to claim 9, the time switch processor further
2 comprising:
3 a buffer; and
4 a time switch controller to sequentially write each octet in the incoming ATM
5 cells into the buffer and for reading the octets from the buffer using read addresses
6 supplied by the microprocessor.

1 13. A method for establishing a switching path between an originating port and
2 a destination port in a network having a call server and plural controllers, the method
3 comprising the steps of:
4 receiving from the plural controllers packets in which data from the originating
5 port is located in a particular packet slot assigned to the originating port;

Variable	Mean	SD	Min	Max	Skewness	Kurtosis	Normality
Age	35.2	12.5	18	65	-0.1	3.2	0.95
Gender	1.2	0.4	1	2	0.1	3.1	0.98
Education	12.5	2.1	9	16	-0.2	3.3	0.96
Income	2500	1500	500	6000	0.3	3.4	0.92
Health	1.5	0.5	1	2	0.2	3.2	0.97
Stress	2.8	1.2	1	5	0.4	3.5	0.88
Life Satisfaction	4.2	1.5	1	7	-0.3	3.3	0.94
Resilience	3.5	1.0	1	6	-0.2	3.2	0.96
Optimism	4.5	1.2	1	7	-0.1	3.1	0.97
Gratitude	5.2	1.4	1	8	-0.2	3.3	0.95
Self-Compassion	3.8	1.1	1	6	-0.1	3.2	0.96
Emotional Stability	4.8	1.3	1	7	-0.2	3.3	0.94
Life Purpose	3.2	1.0	1	6	-0.1	3.2	0.97
Meaning in Life	4.5	1.2	1	7	-0.2	3.3	0.95
Existential Well-being	3.5	1.1	1	6	-0.1	3.2	0.96
Transcendental Experience	2.5	0.8	1	4	-0.1	3.1	0.97
Religious Faith	3.0	0.9	1	4	-0.1	3.2	0.96
Spiritual Growth	3.8	1.0	1	6	-0.1	3.2	0.97
Inner Peace	4.0	1.1	1	6	-0.1	3.2	0.96
Life Satisfaction (Control)	4.2	1.5	1	7	-0.3	3.3	0.94
Resilience (Control)	3.5	1.0	1	6	-0.2	3.2	0.96
Optimism (Control)	4.5	1.2	1	7	-0.1	3.1	0.97
Gratitude (Control)	5.2	1.4	1	8	-0.2	3.3	0.95
Self-Compassion (Control)	3.8	1.1	1	6	-0.1	3.2	0.96
Emotional Stability (Control)	4.8	1.3	1	7	-0.2	3.3	0.94
Life Purpose (Control)	3.2	1.0	1	6	-0.1	3.2	0.97
Meaning in Life (Control)	4.5	1.2	1	7	-0.2	3.3	0.95
Existential Well-being (Control)	3.5	1.1	1	6	-0.1	3.2	0.96
Transcendental Experience (Control)	2.5	0.8	1	4	-0.1	3.1	0.97
Religious Faith (Control)	3.0	0.9	1	4	-0.1	3.2	0.96
Spiritual Growth (Control)	3.8	1.0	1	6	-0.1	3.2	0.97
Inner Peace (Control)	4.0	1.1	1	6	-0.1	3.2	0.96

5

FIG. 1 is a block diagram of a network architecture.

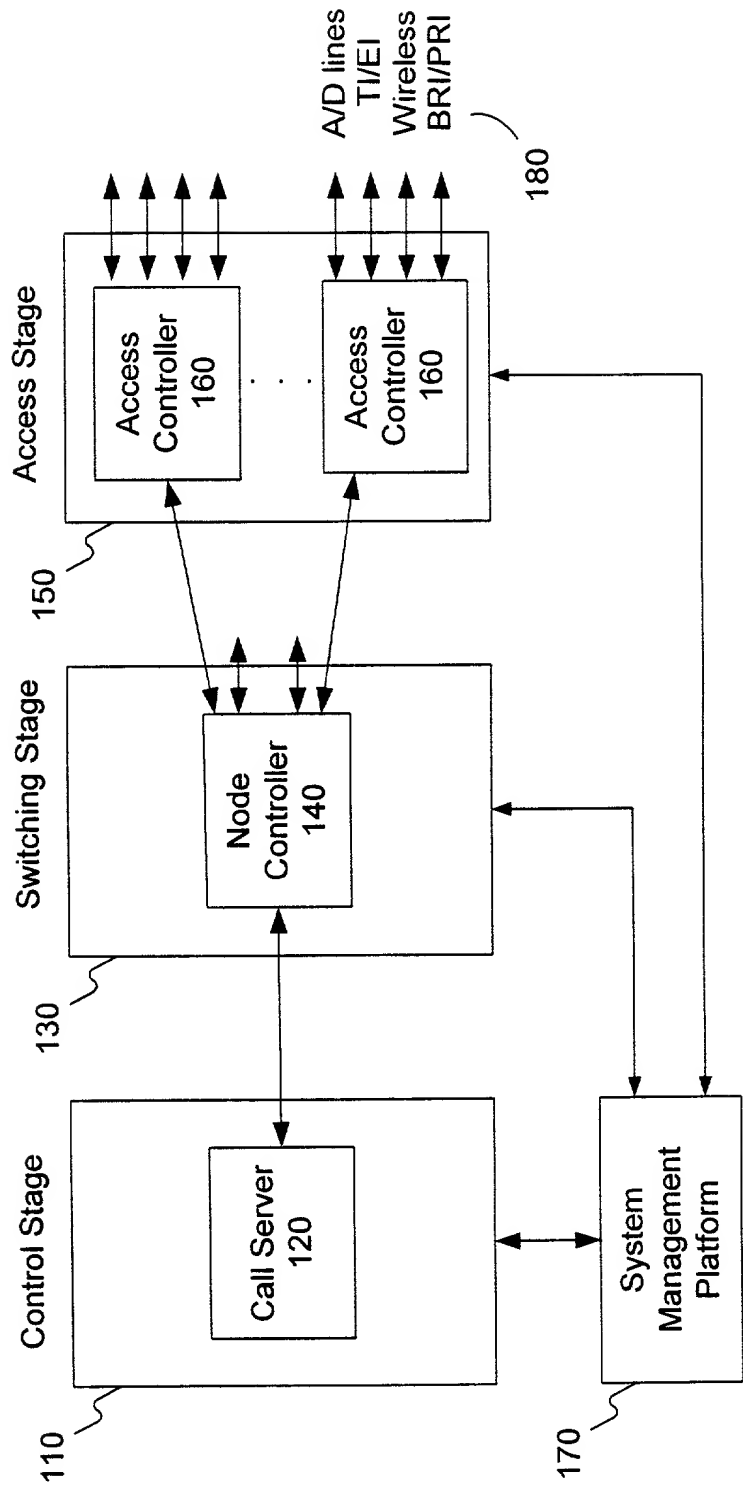


Fig. 1

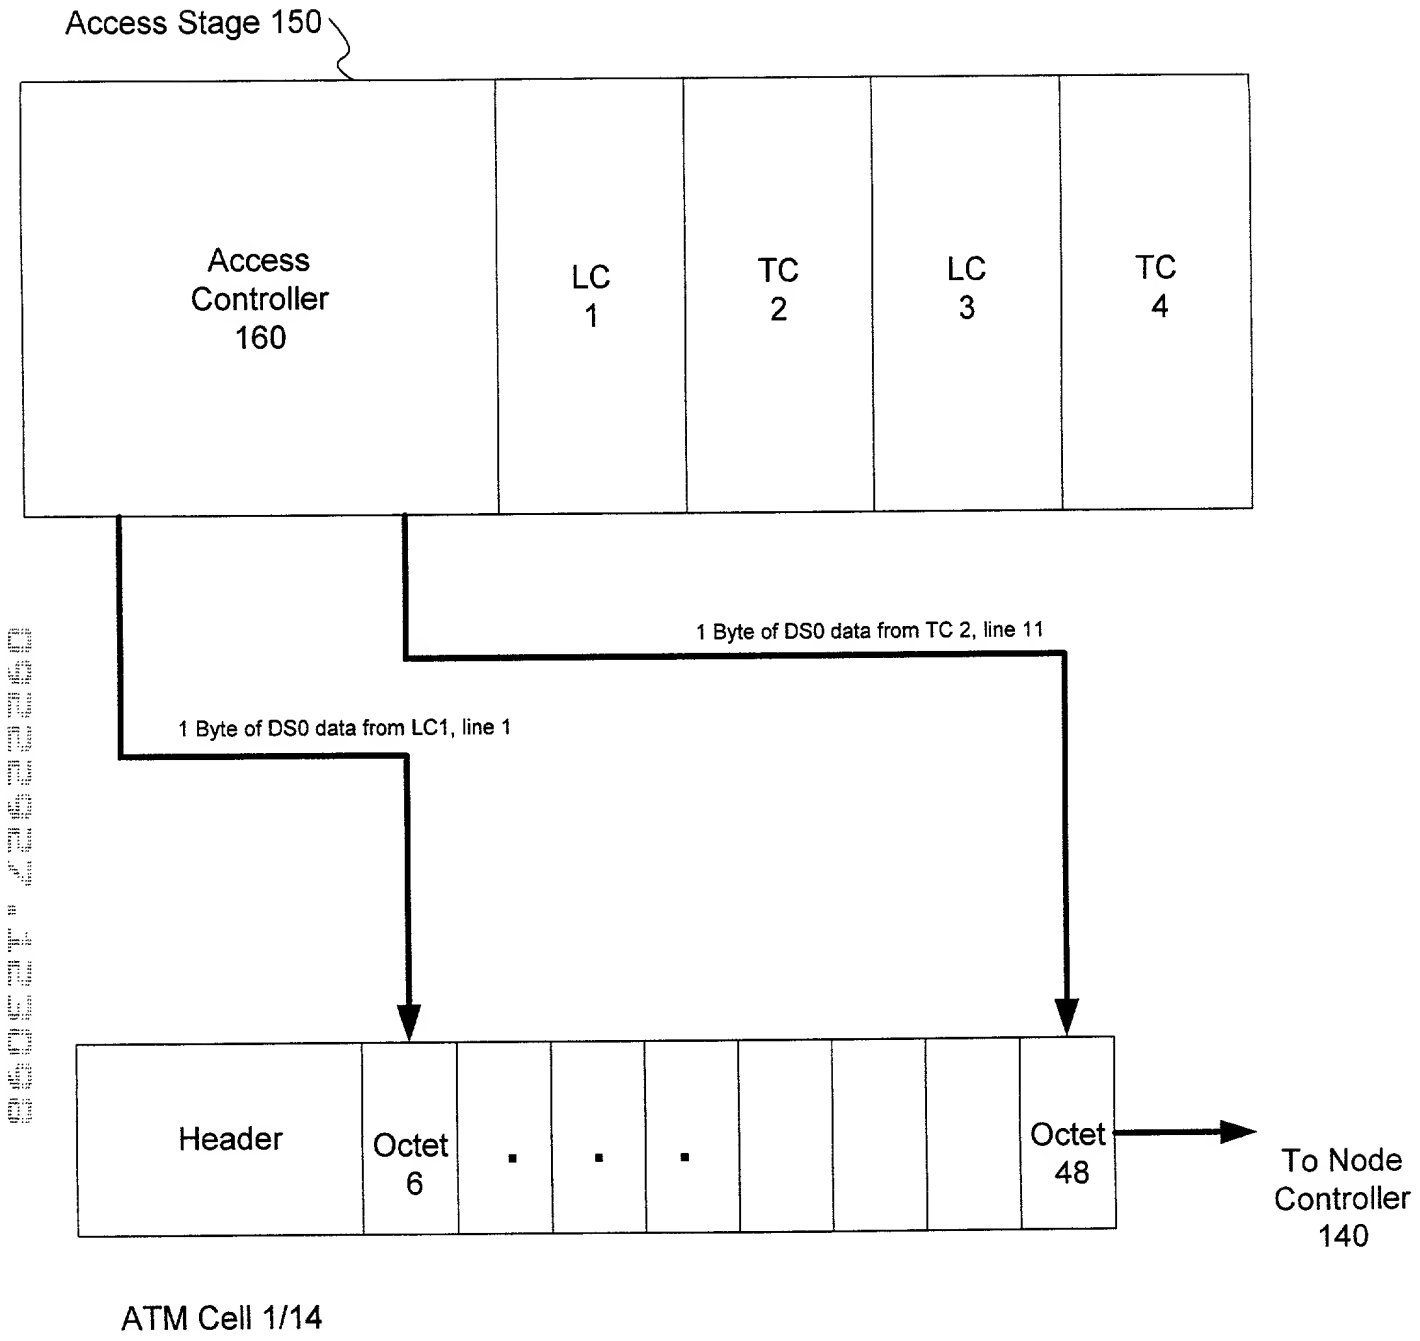


FIG. 2

FIG. 3 is a block diagram of a network architecture for ATM cell processing.

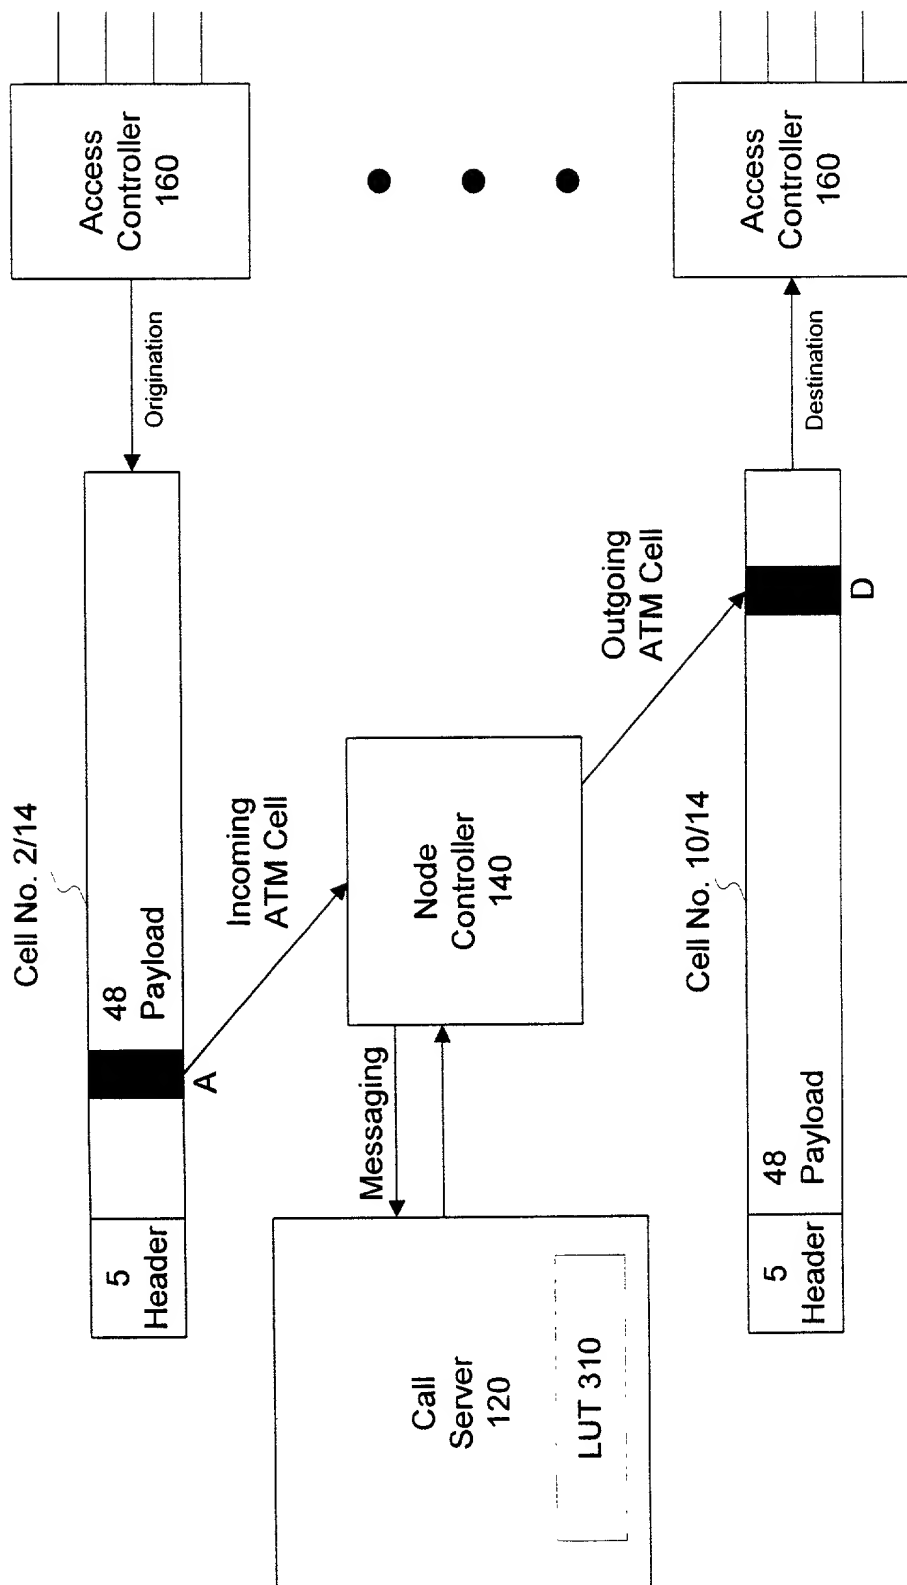


Fig. 3

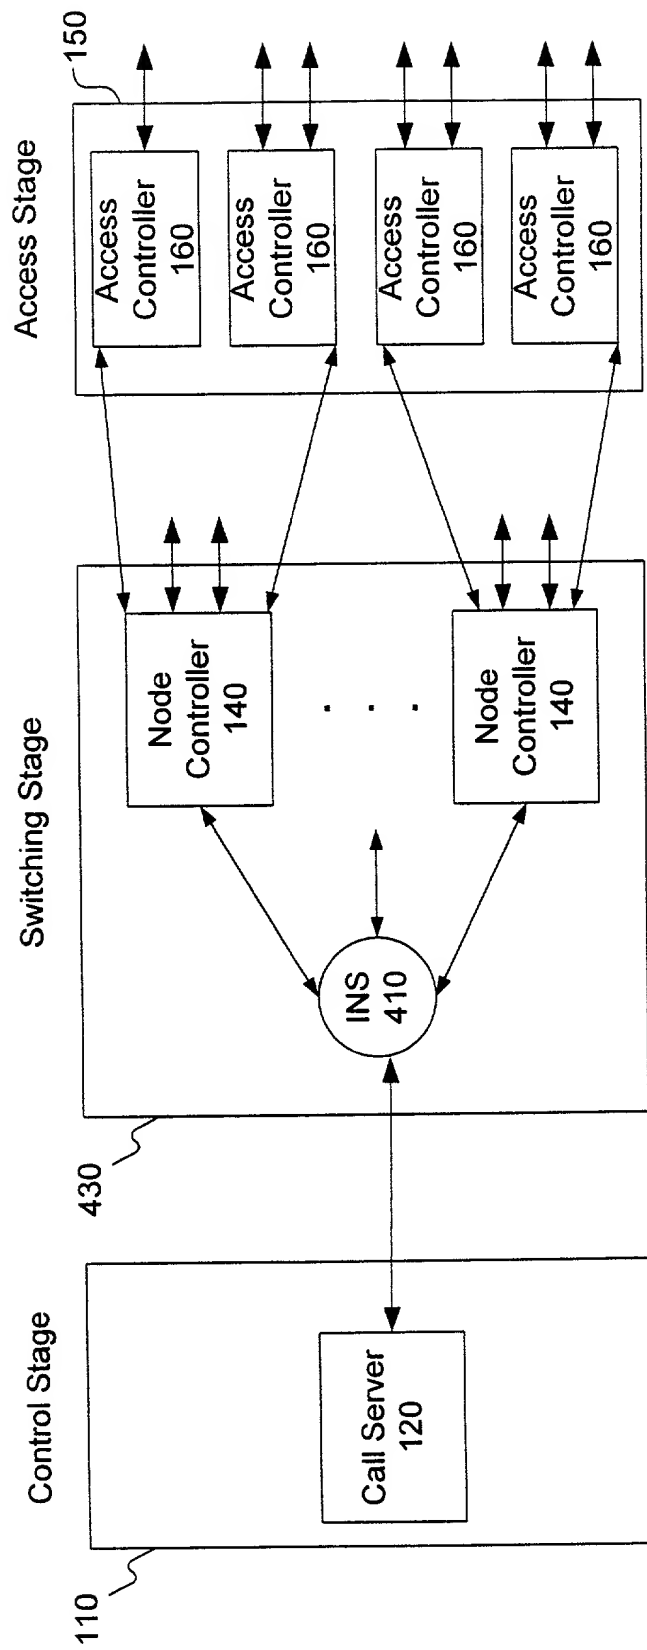


Fig. 4

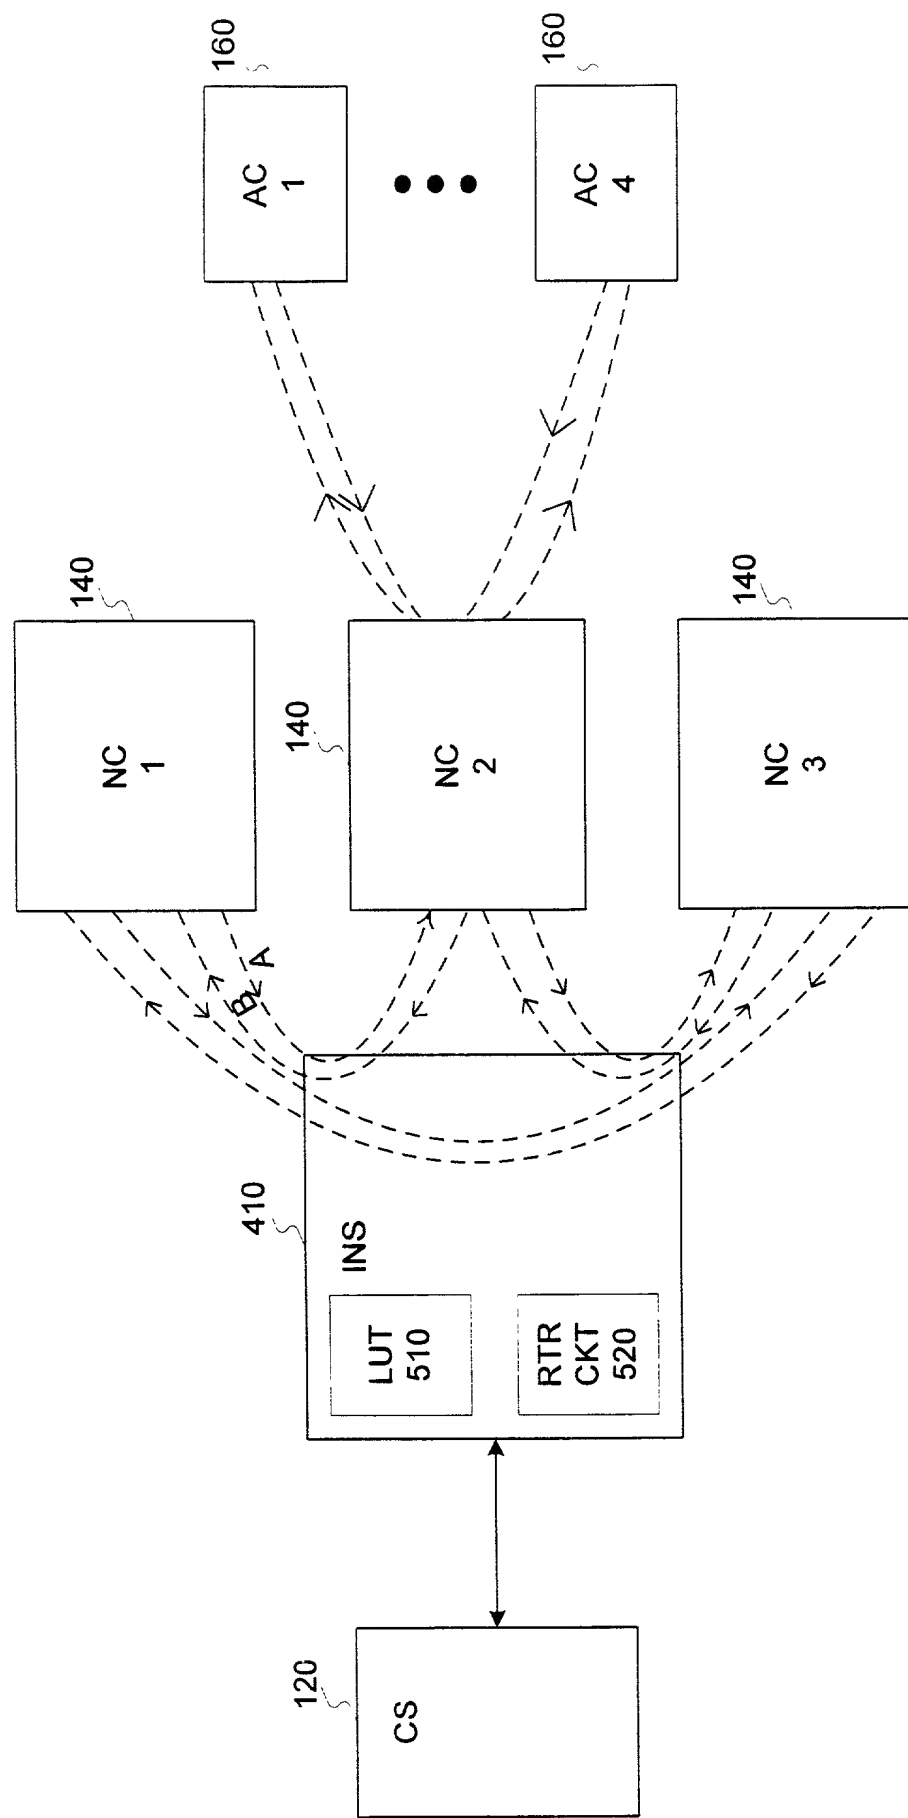


Fig. 5

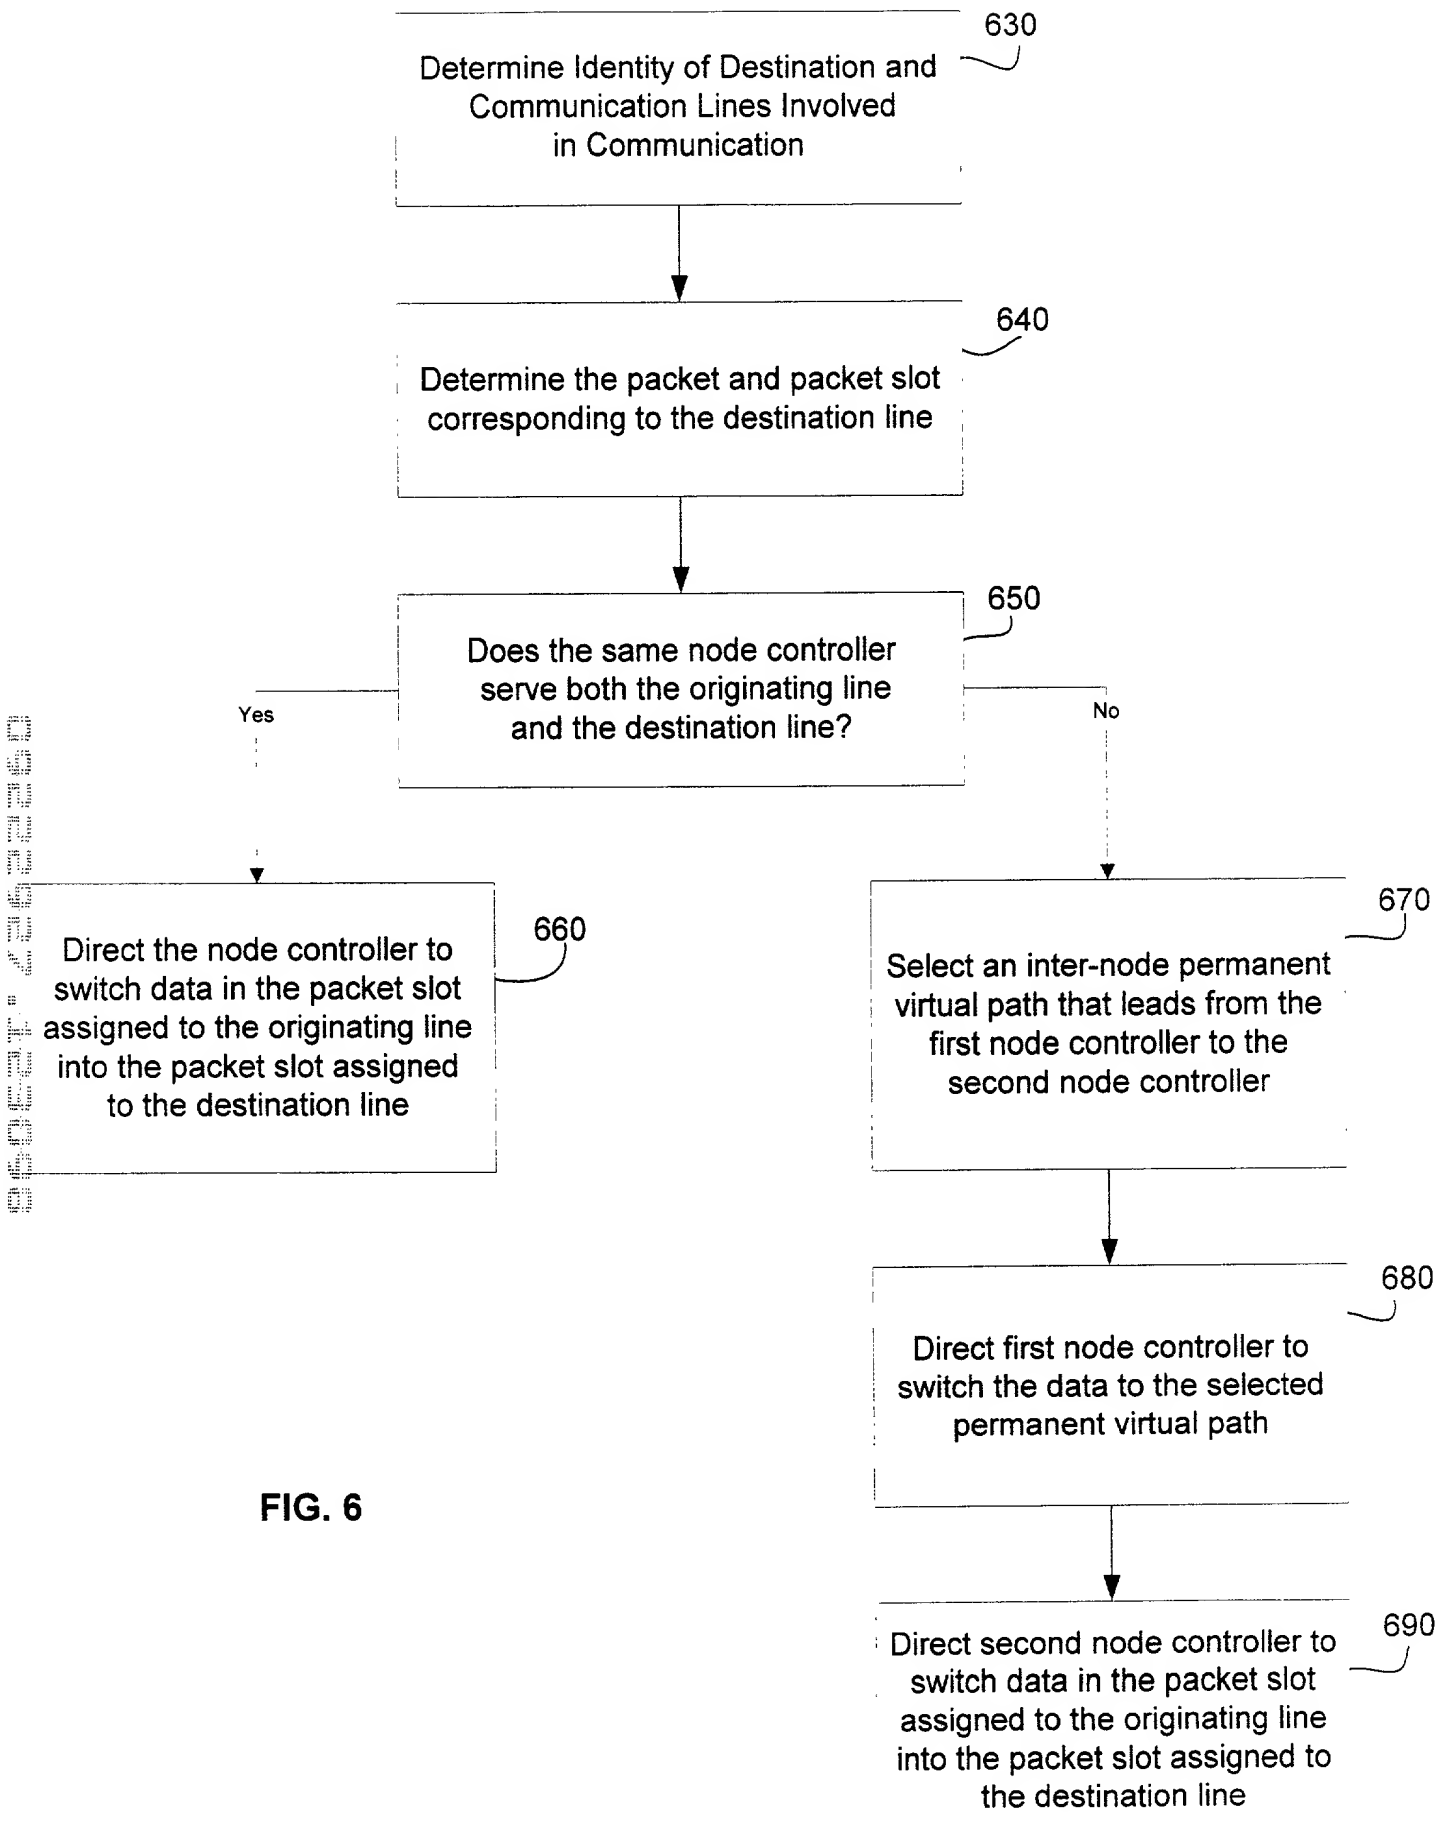


FIG. 6

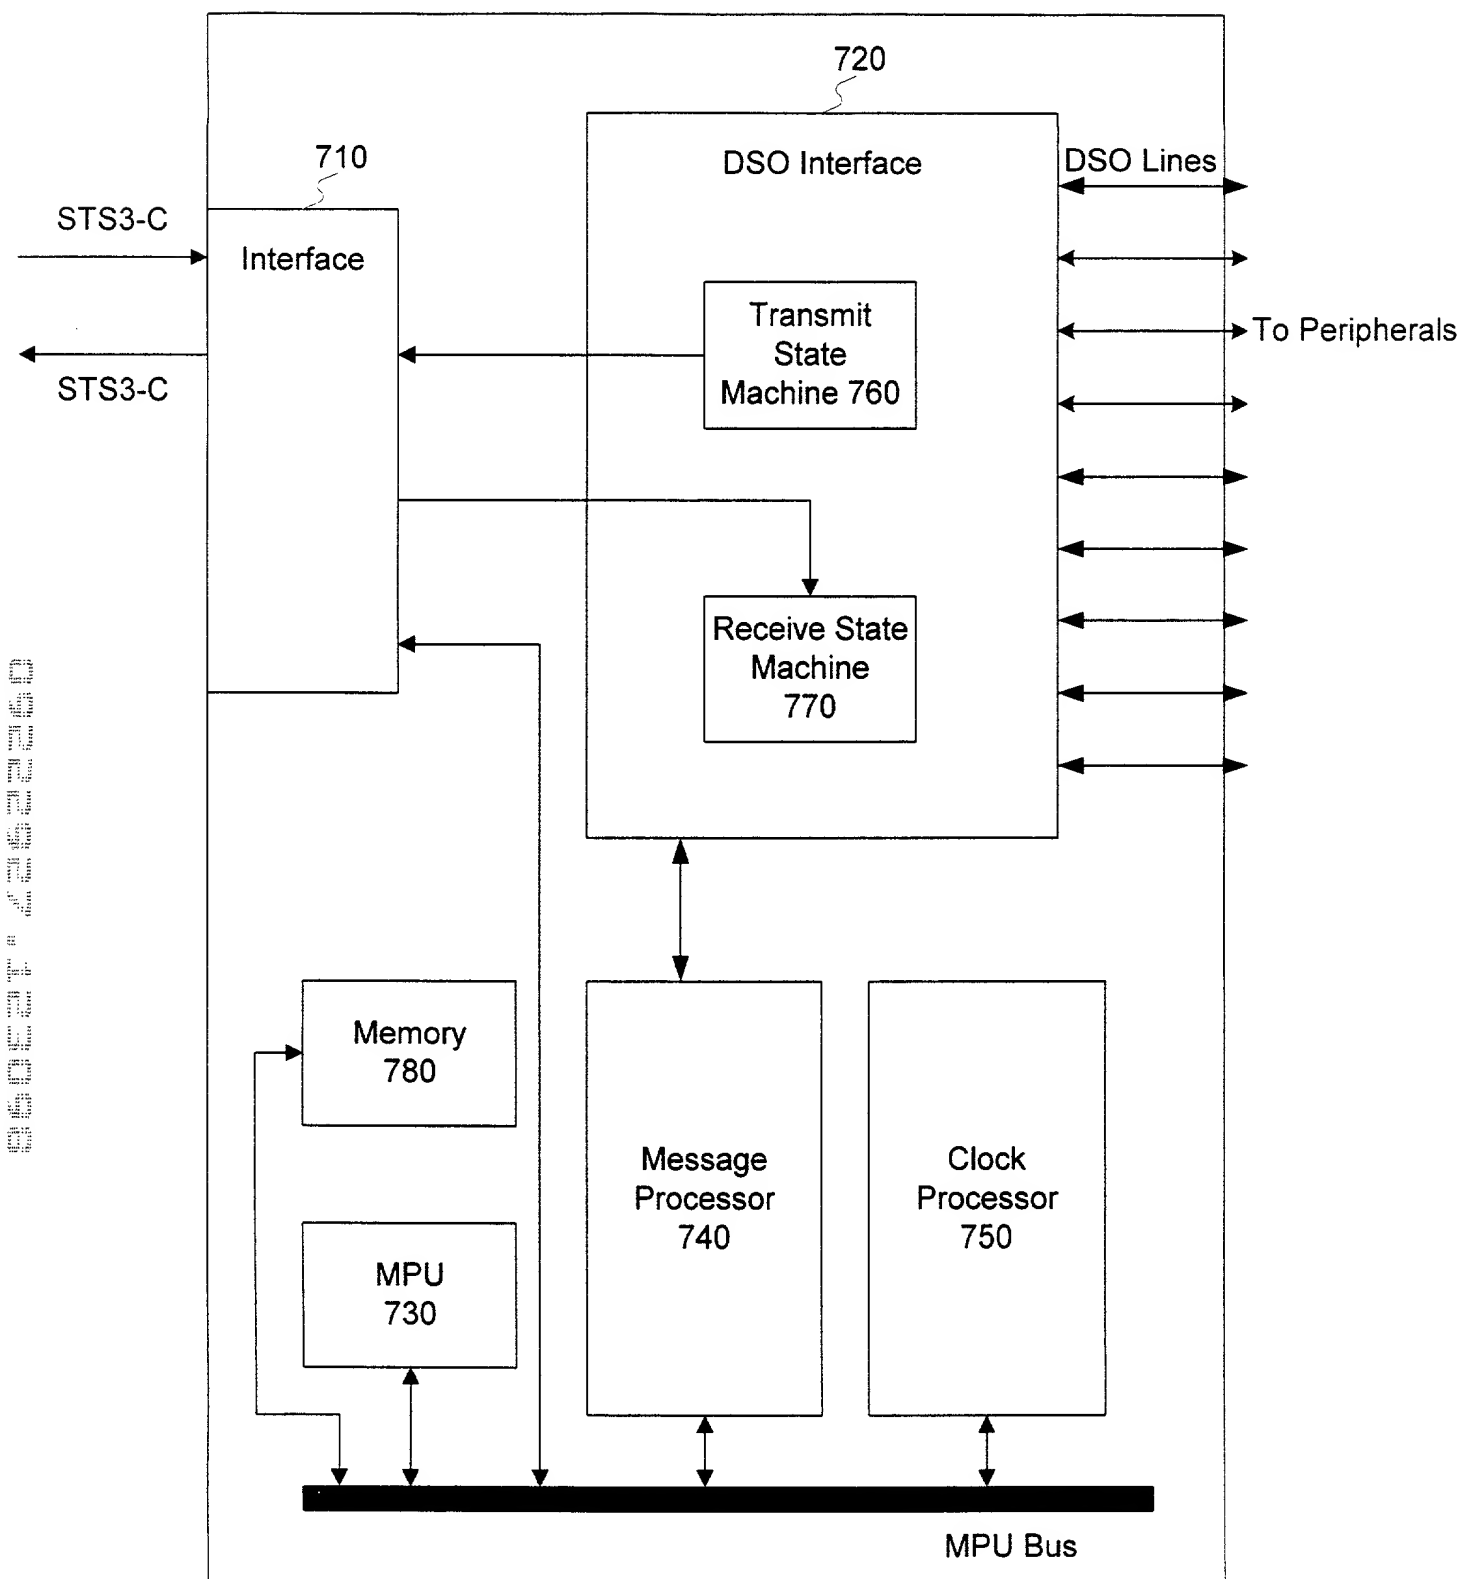


Fig. 7

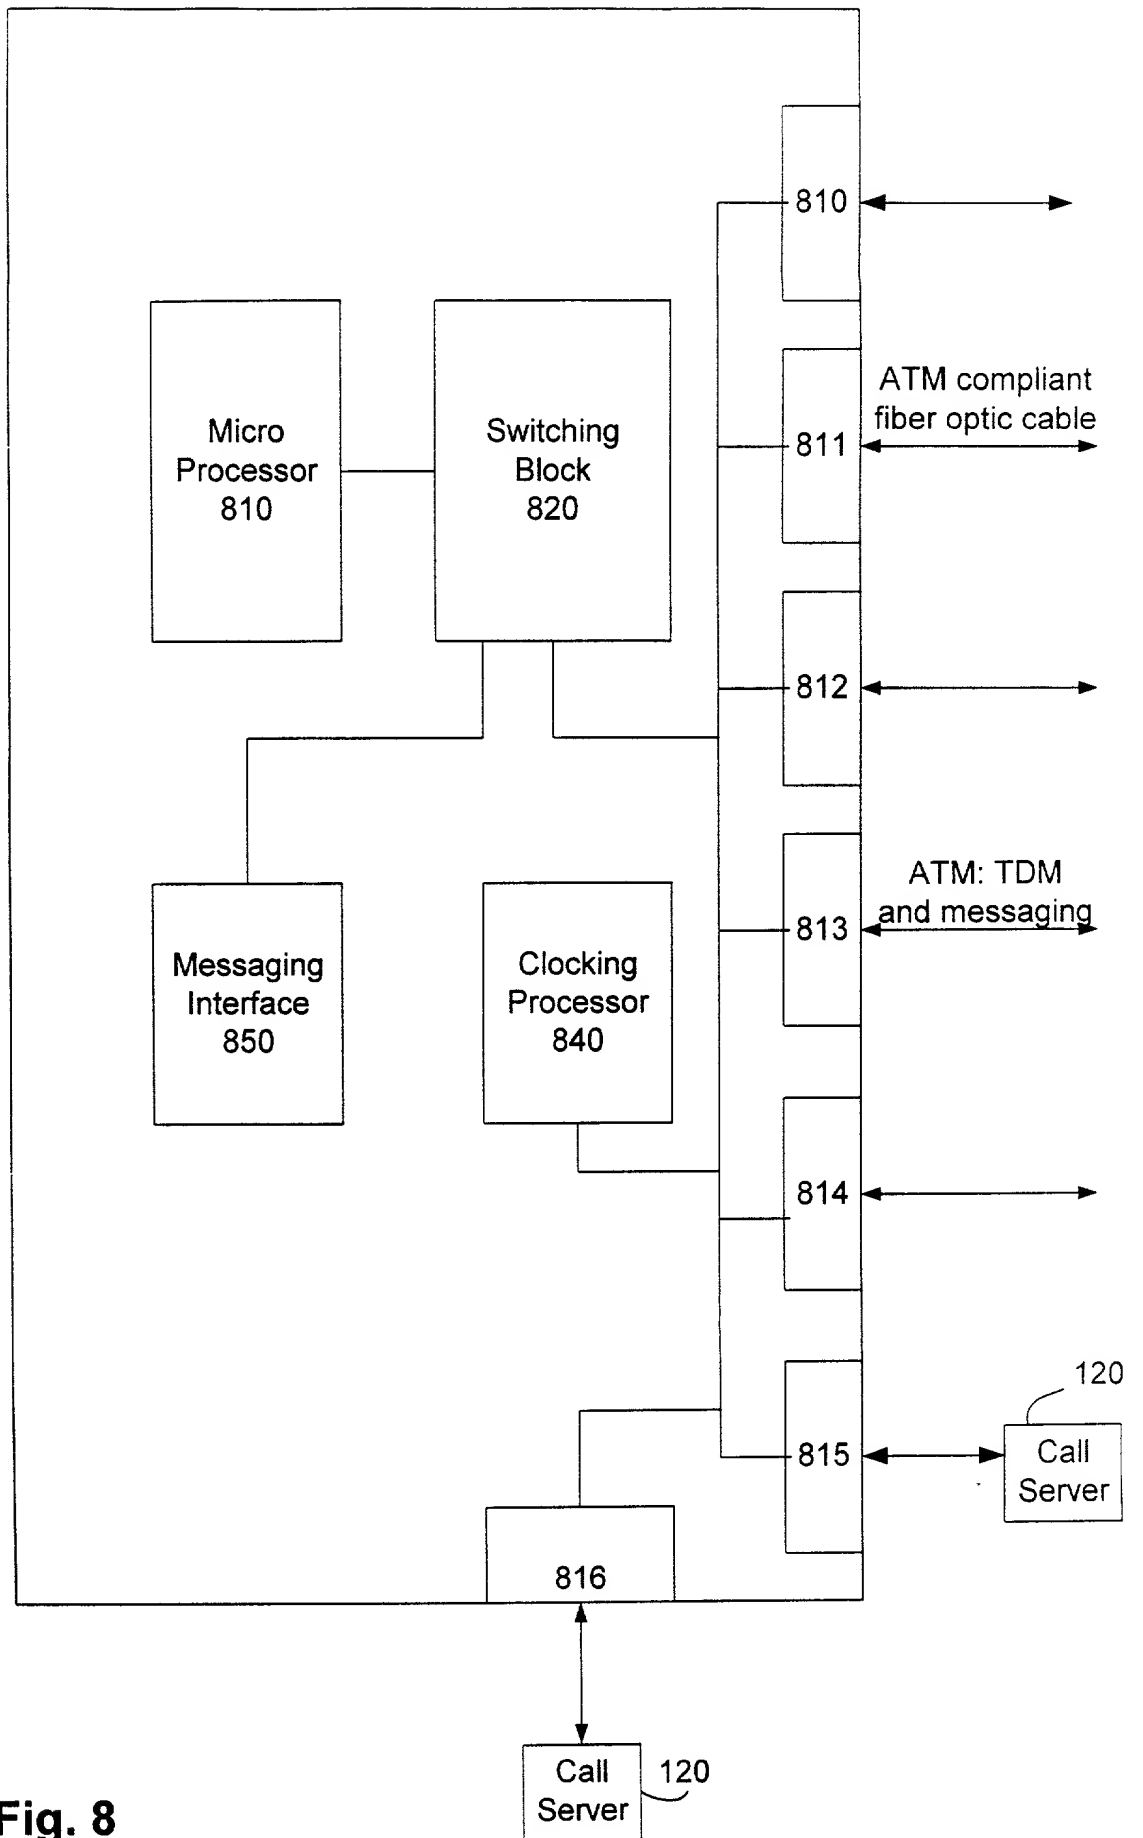


Fig. 8

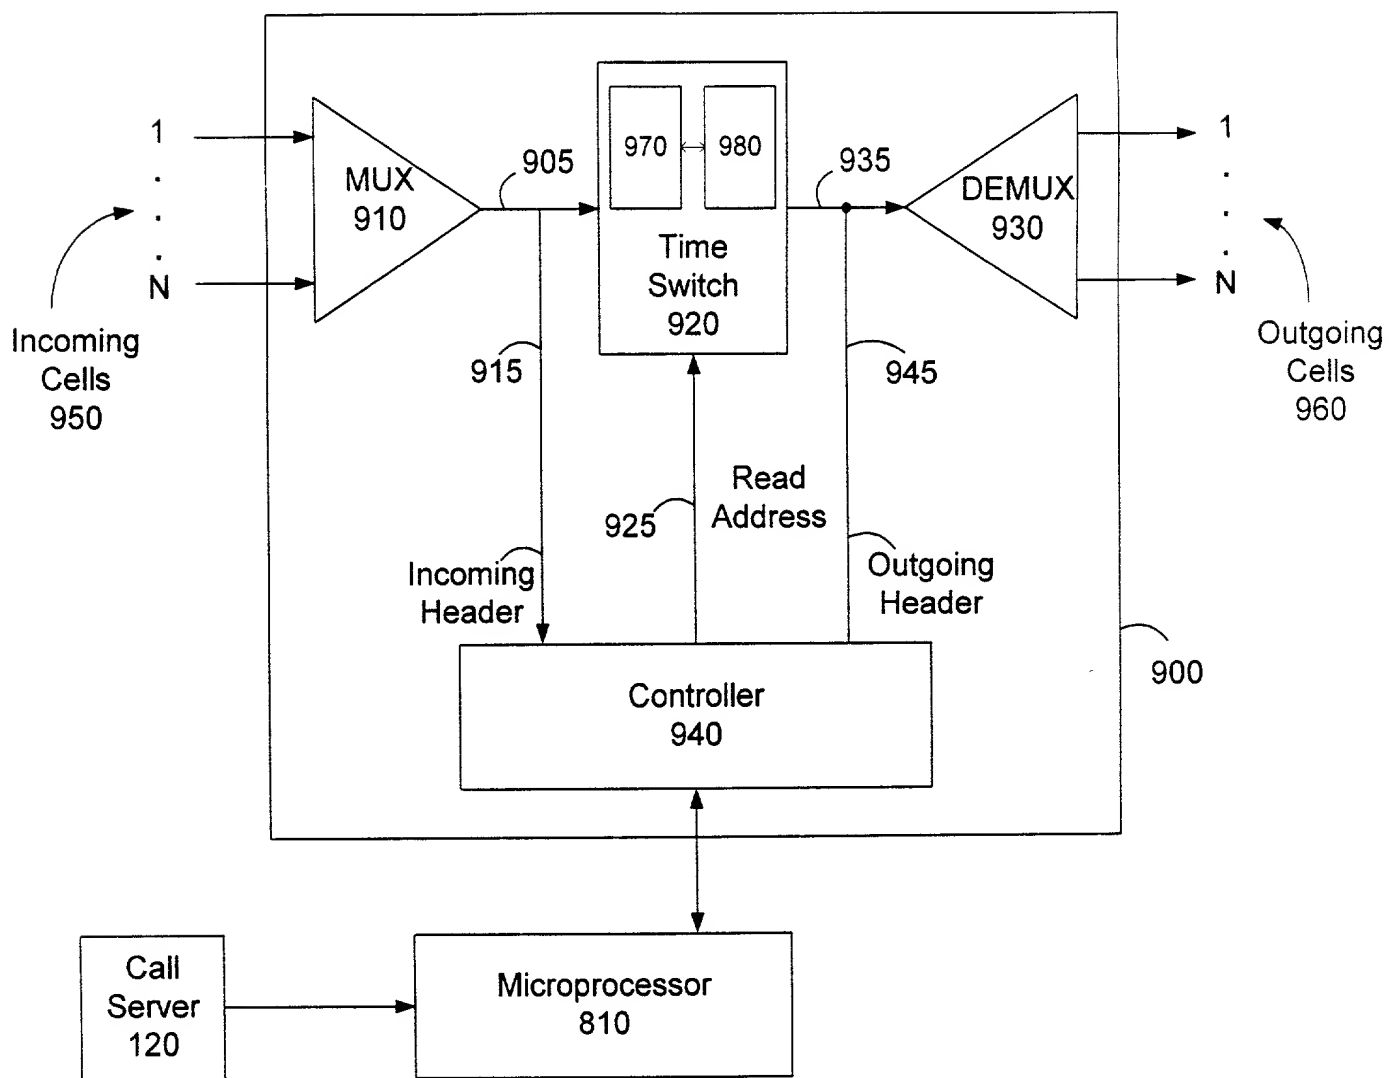


Fig. 9

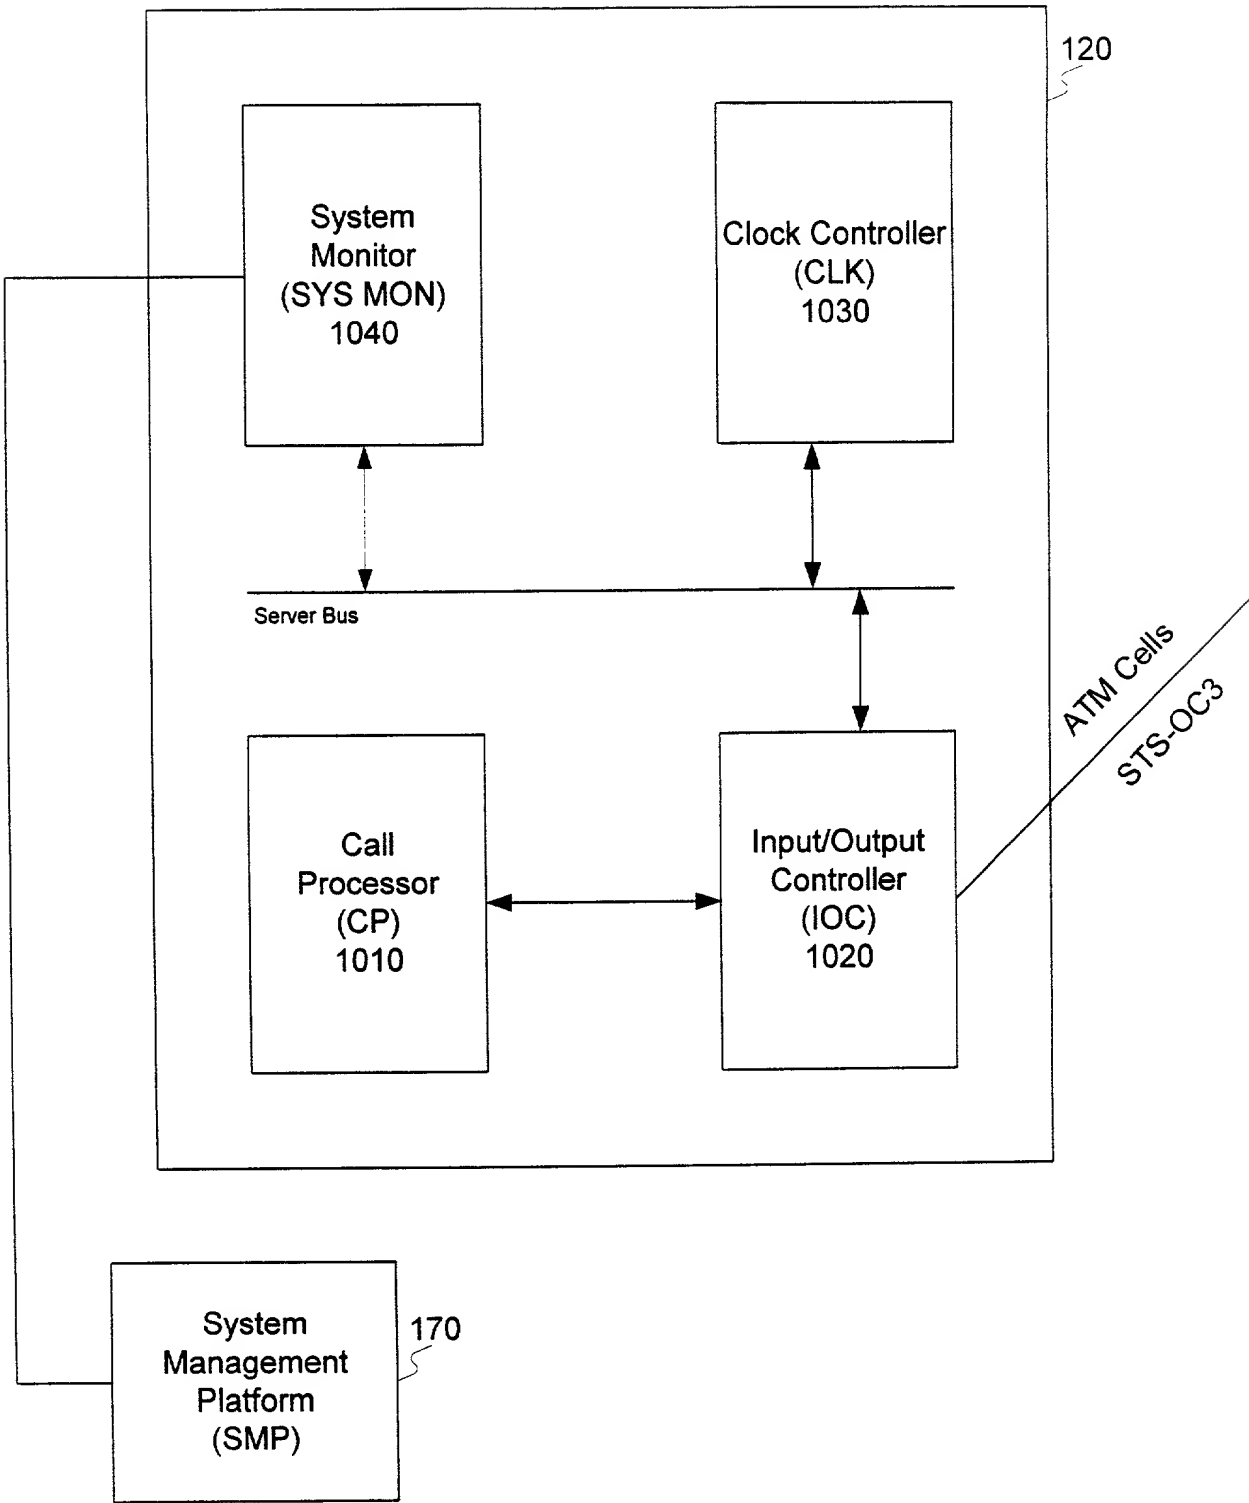


Fig. 10

Synchronization

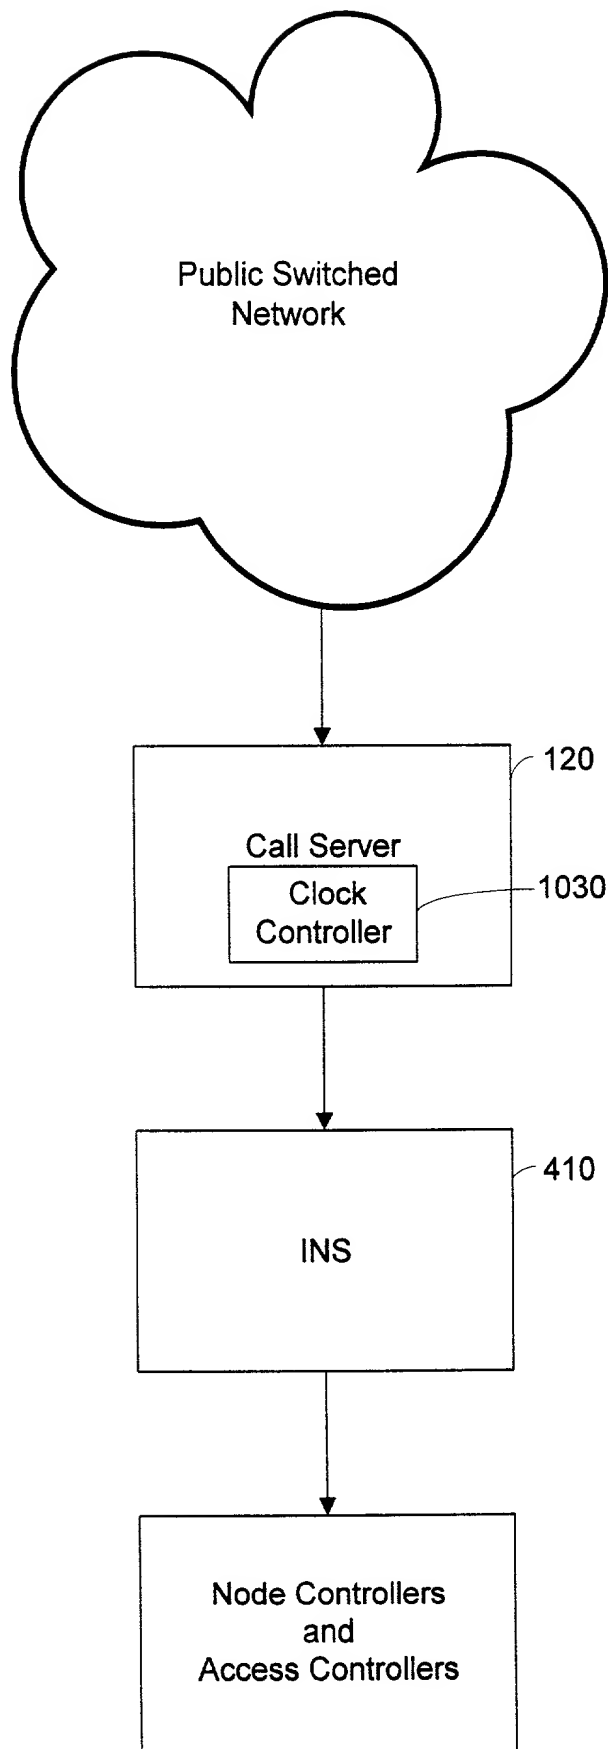


Fig. 11

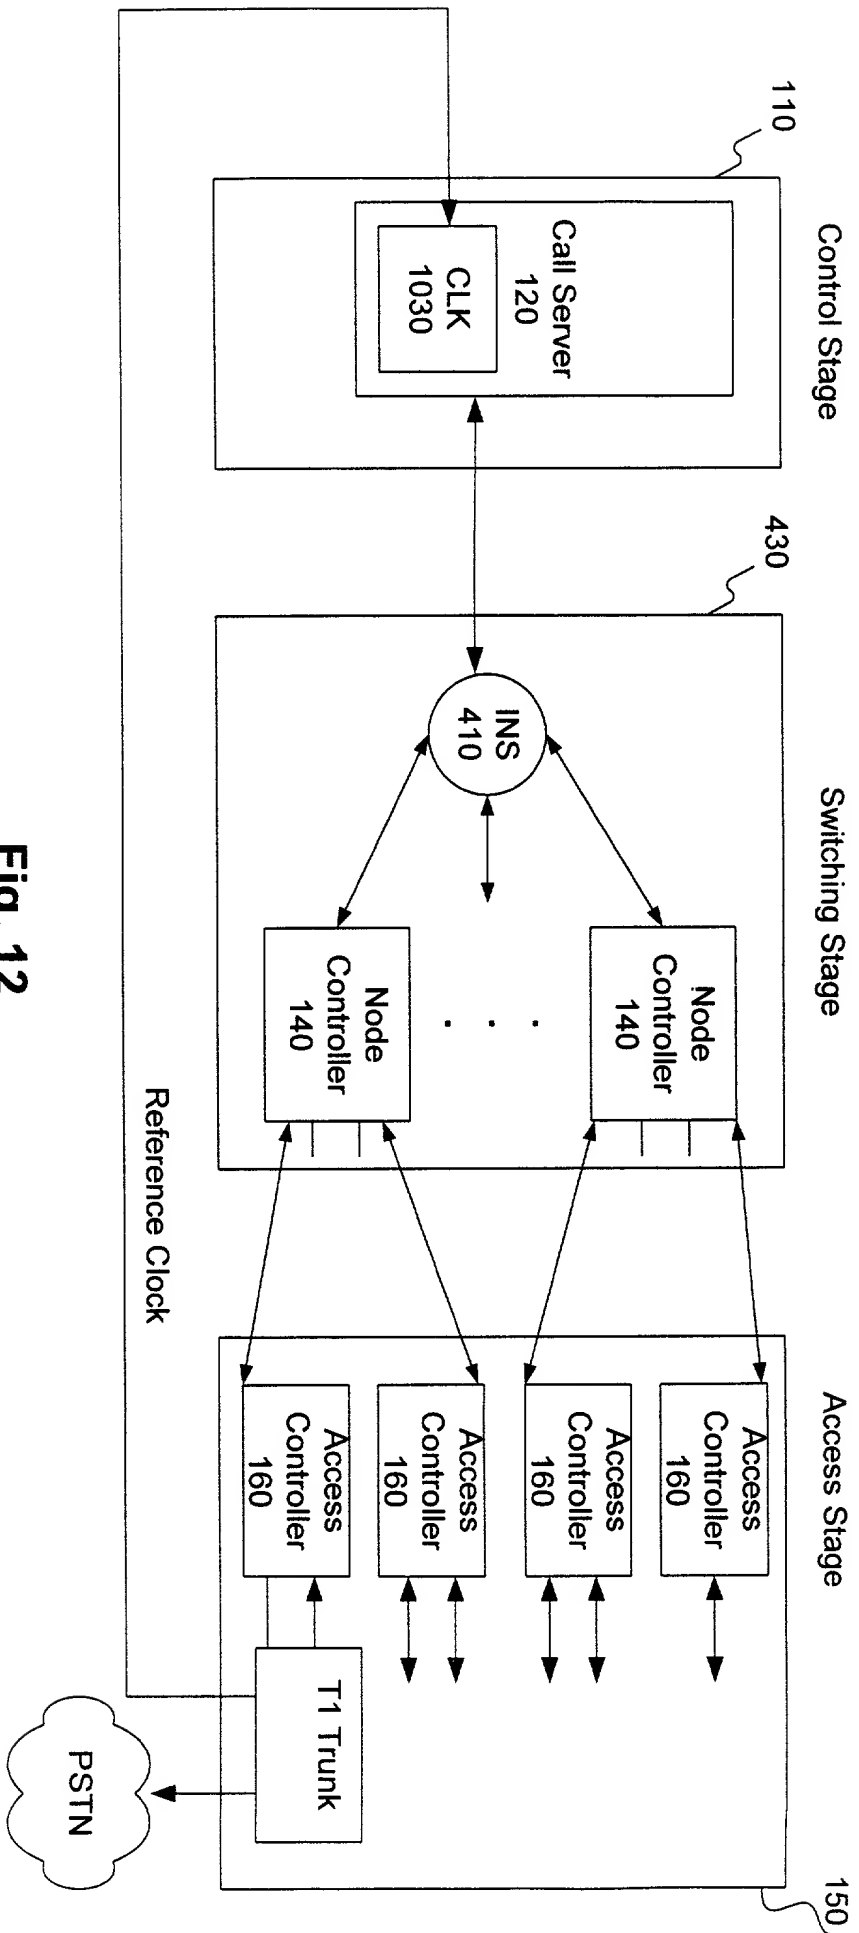


Fig. 12

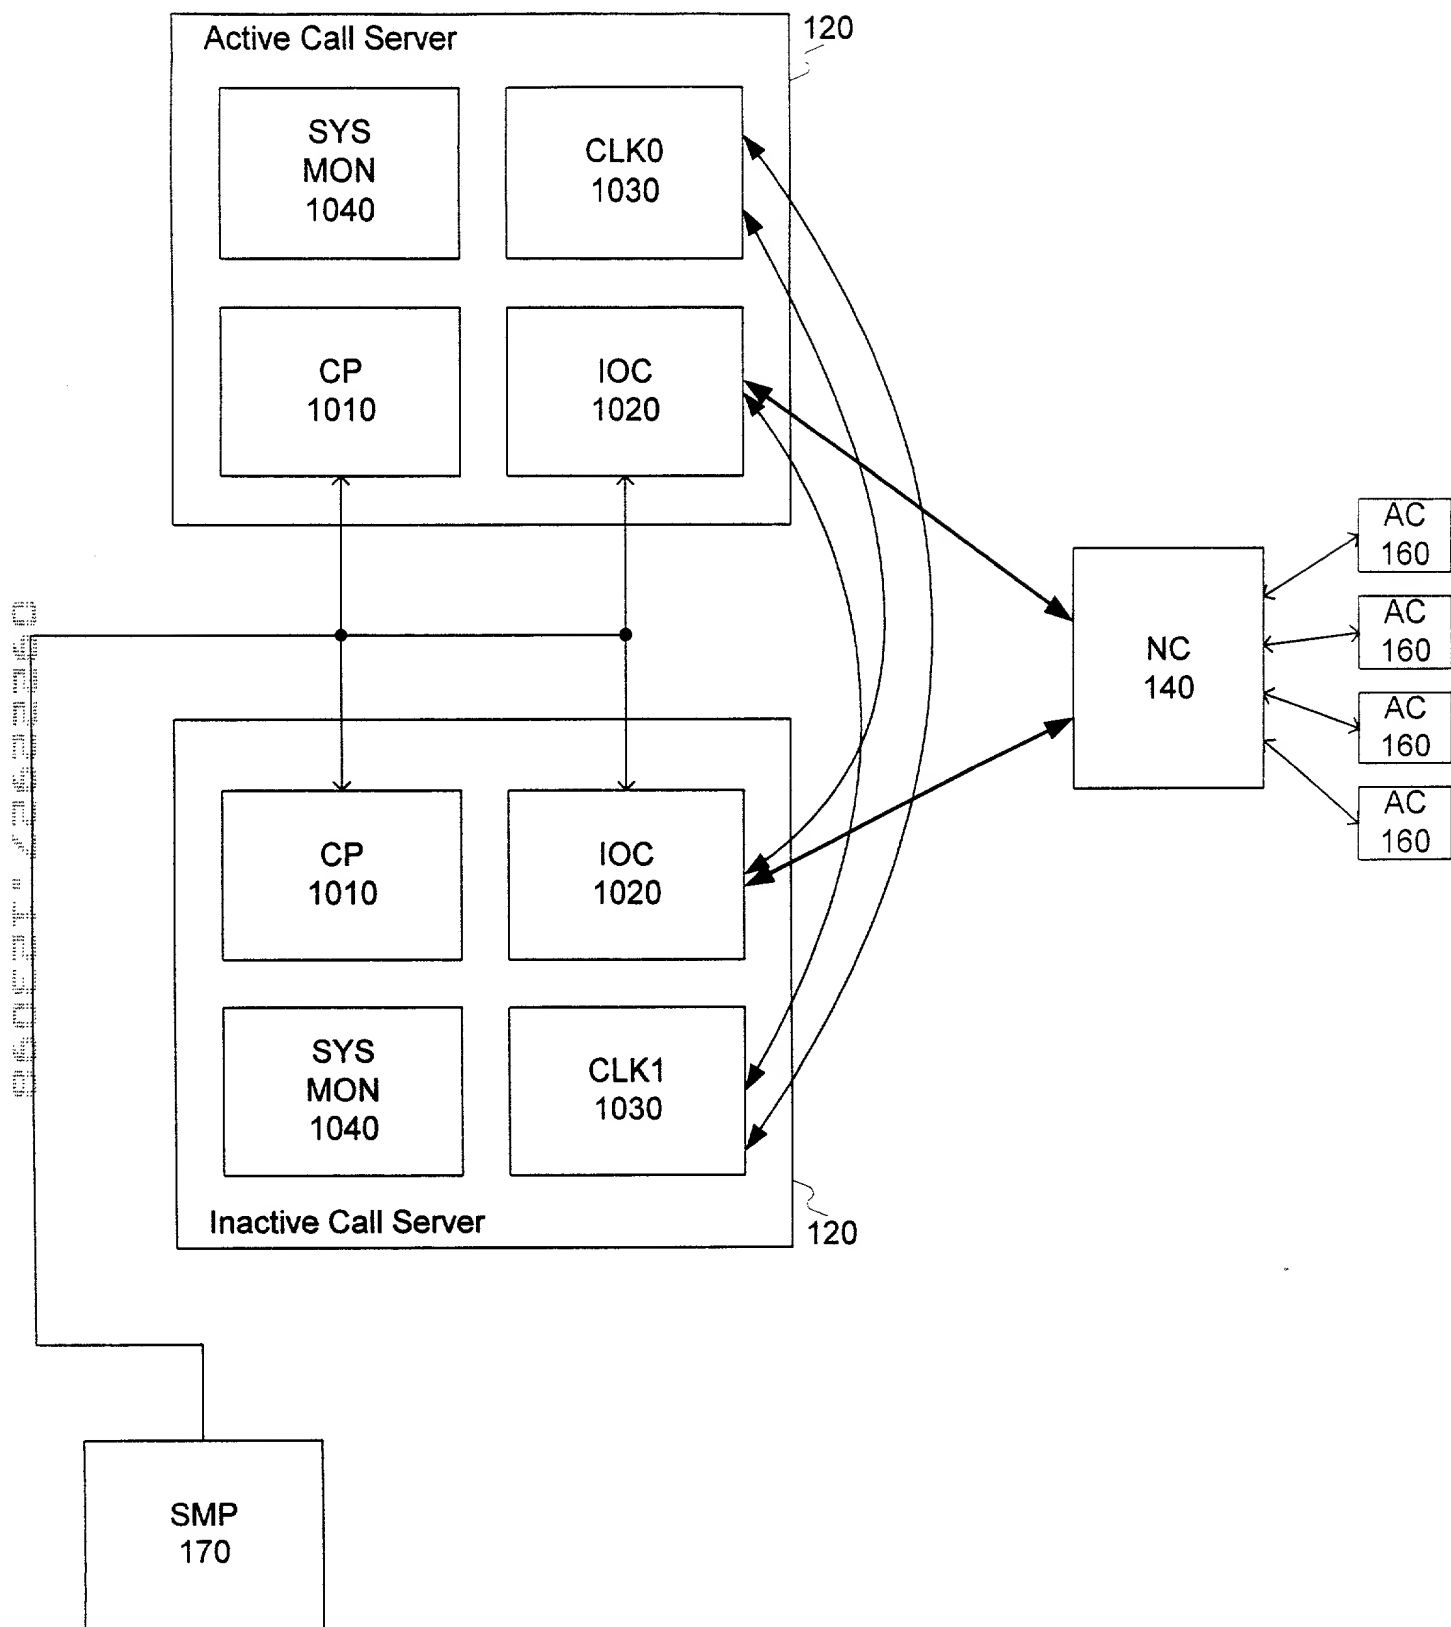


Fig. 13

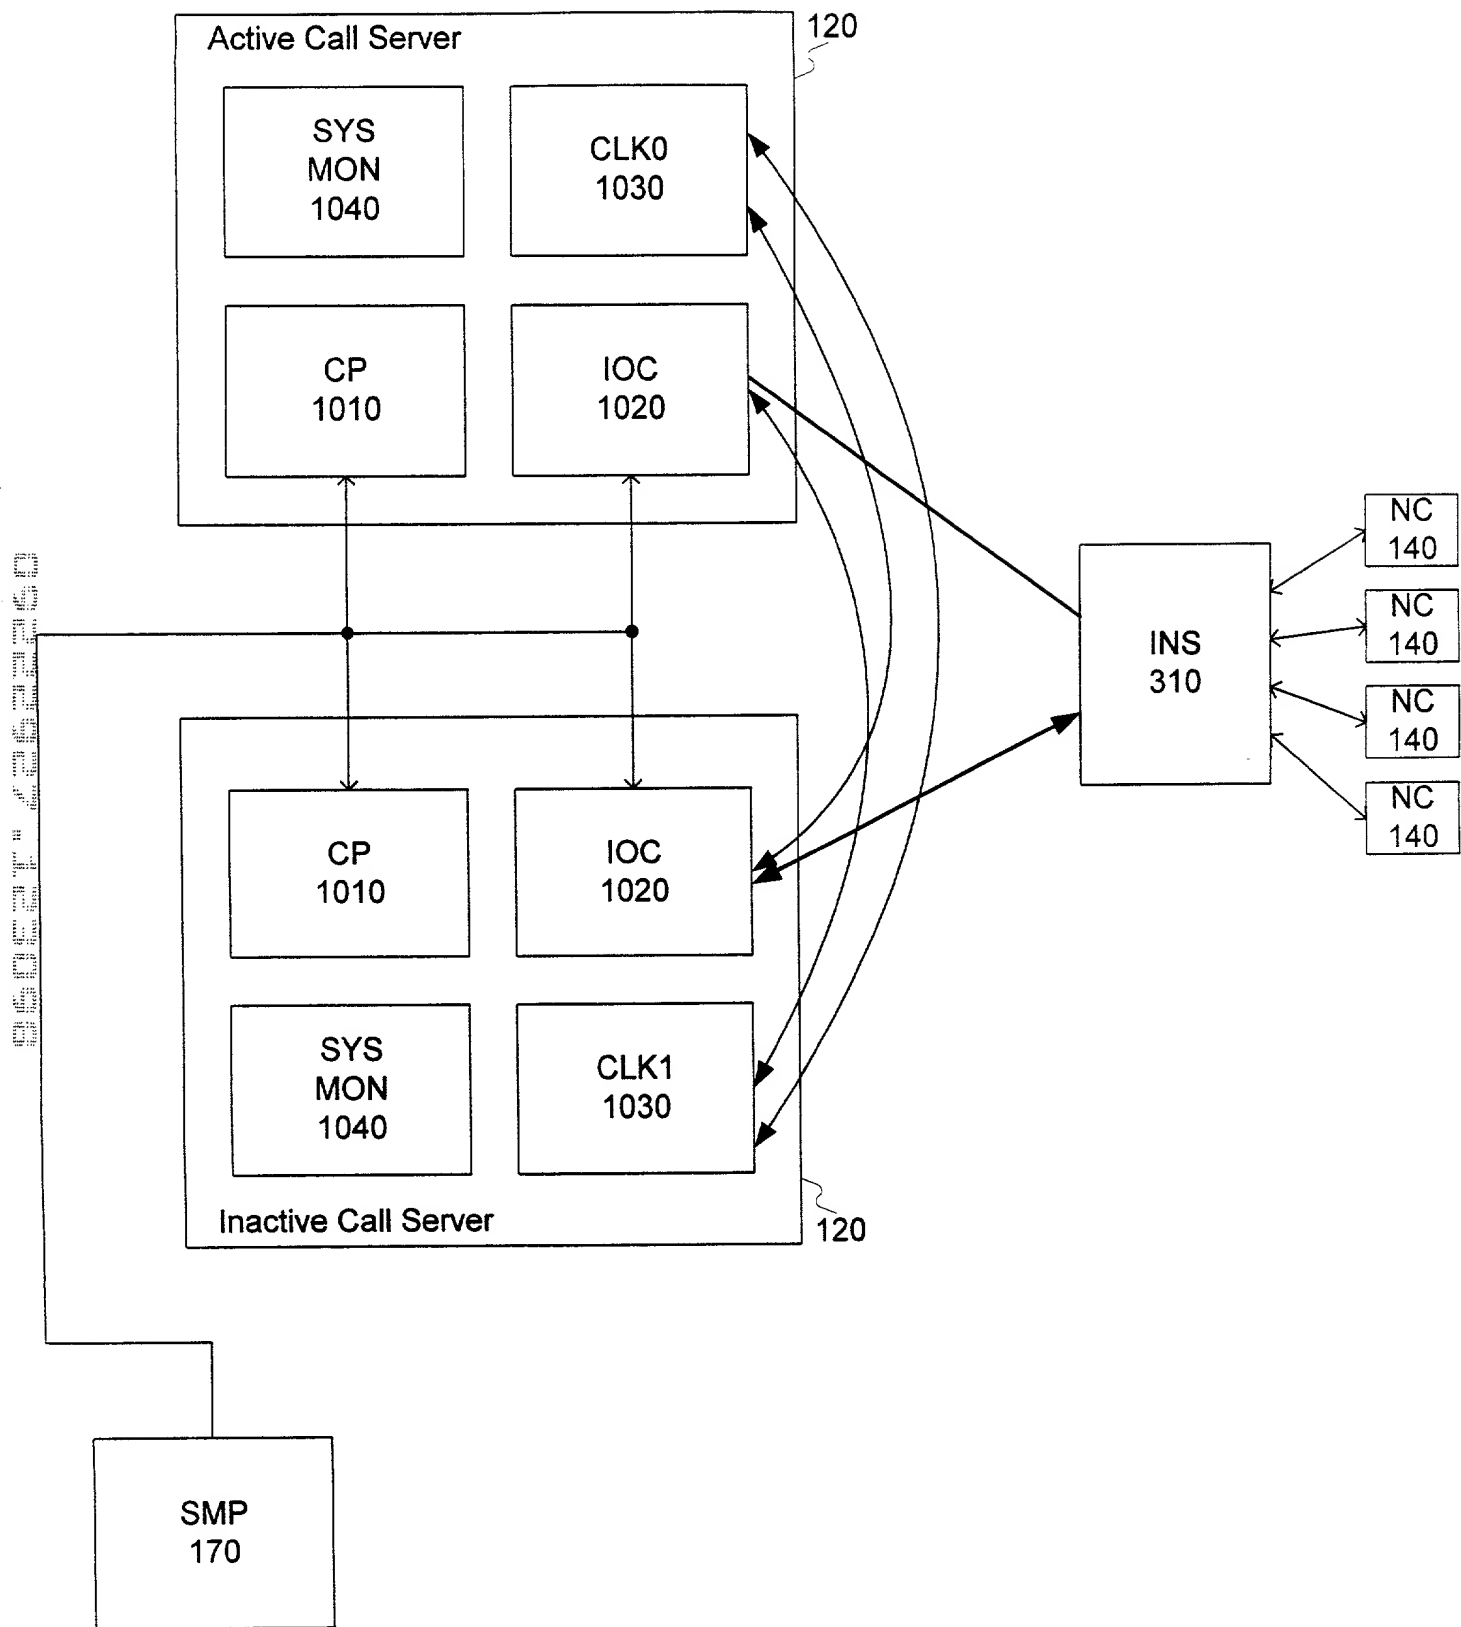


Fig. 14

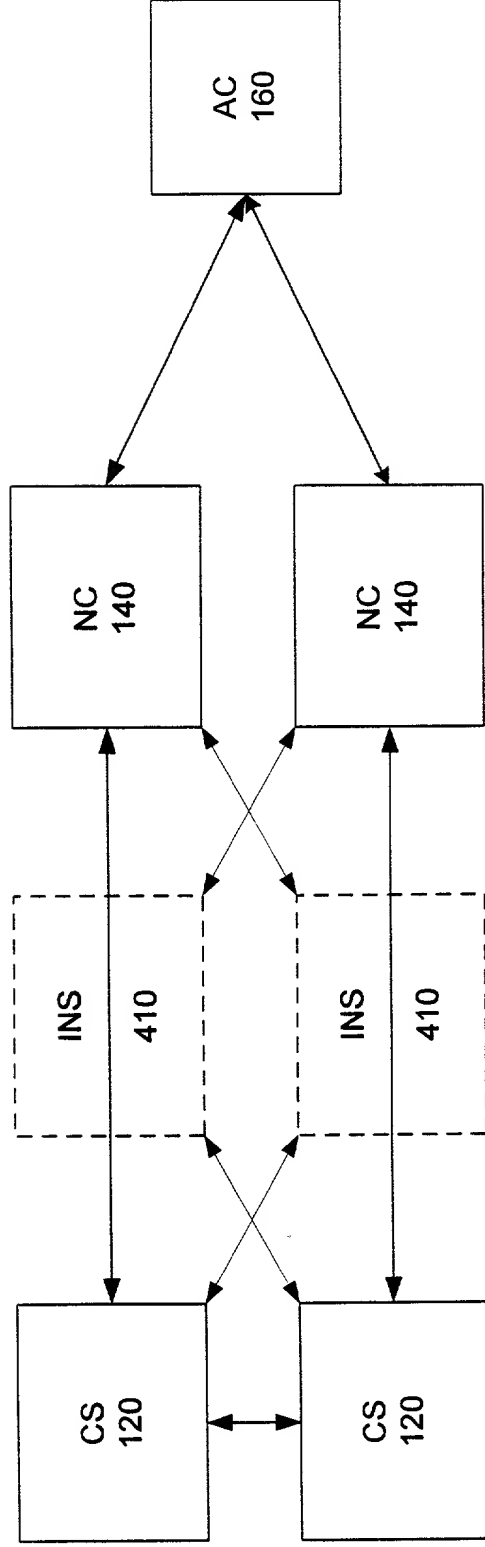


Fig. 15

